




REV	DESCRIPTION	APPROVAL	DATE
A	新制定		06.05.10

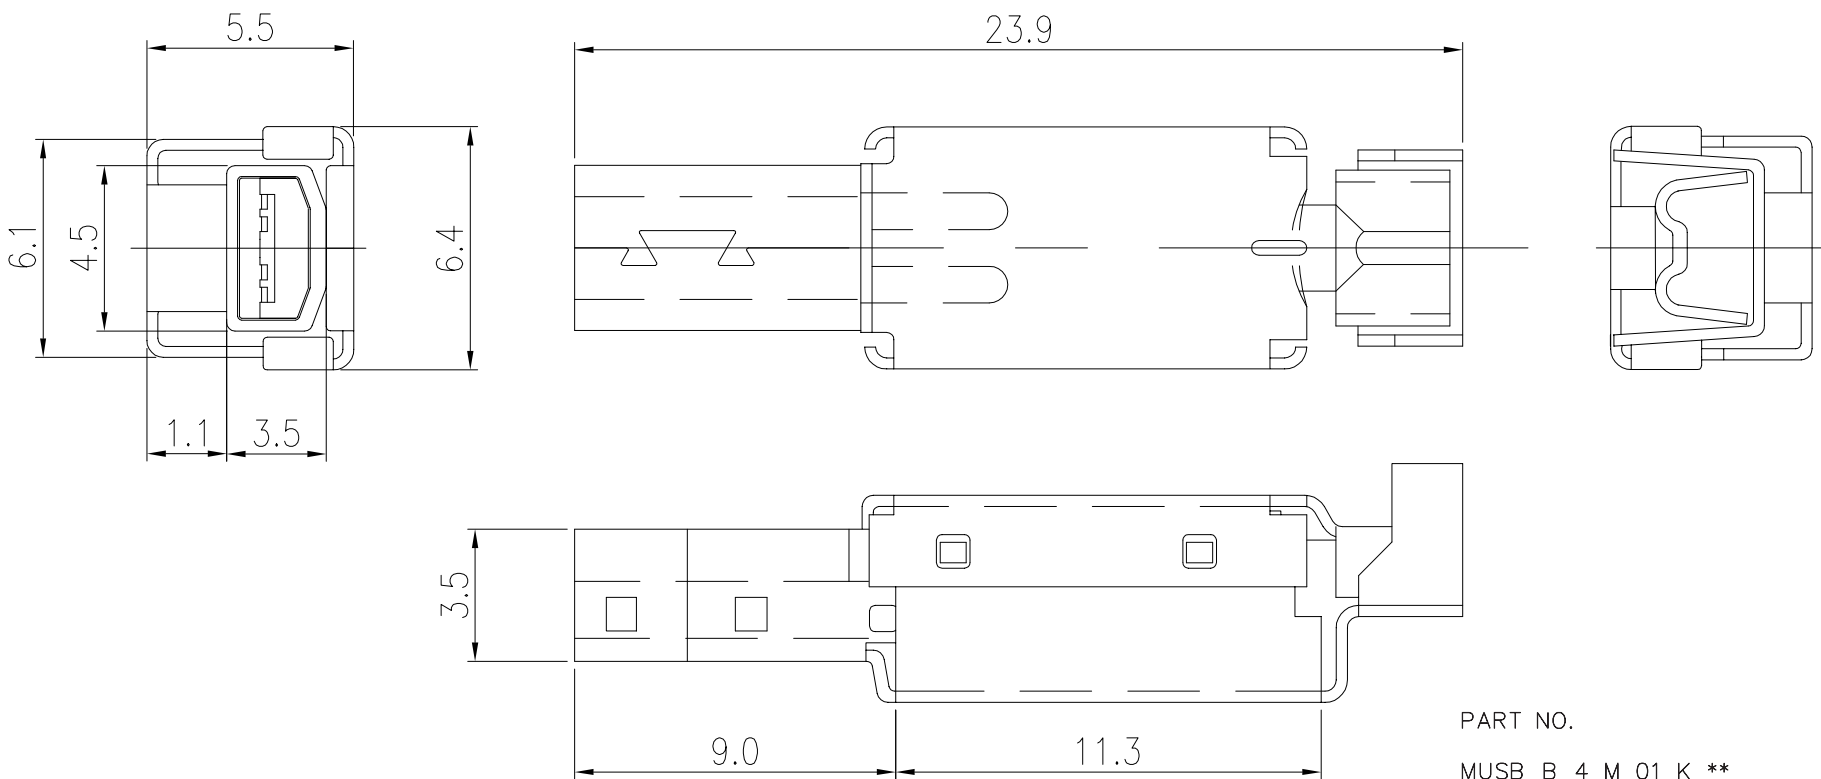

PART NO.
MUSB $\frac{B}{1}$ $\frac{4}{2}$ $\frac{M}{3}$ $\frac{01}{4}$ $\frac{K}{5}$ $\frac{**}{6}$

1. MINI USB B TYPE
2. No. of Contact: 4 Positions
3. M: Plug
4. 01: Wire Soldering
5. Color of Insulation: K Black, W White
6. Plating of Contact:
05: 05u" Gold ... 30: 30u" Gold

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ± 0.30	X. $\pm 3.0^\circ$
.X ± 0.25	.X $\pm 2.0^\circ$
.XX ± 0.13	.XX $\pm 1.0^\circ$
.XXX ± 0.05	

<div></div> <div>貝強實業有限公司</div> <div>PANSTRONG COMPANY LTD.</div>				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		MINI USB 4P PLUG, B TYPE		APPROVED			
PART NO:		MUSBB4M01K**		DRAW NO			
DRAW. BOX NO:							
SCALE		1:1	REV	A	UNIT	mm	

Note:

1. Safety:

1-1. Rating: AC 5V/1A
1-2. Insulation Resistance: 100M ohm Min at DC 500V
1-3. Dielectric Withstanding Voltage: AC 100V for 1 minute
1-4. Contact Resistance : 30m ohm or less

2. Material:

2-1. PIN: PHOSPHOR BRONZE
2-2. HOUSING: NYLON
2-3. PLASTIC CUP: NYLON
2-4. UP COVER: BRASS/ NICKEL Plating
2-5. DOWN COVER: BRASS/ NICKEL Plating

ROHS-COMPLIANT