

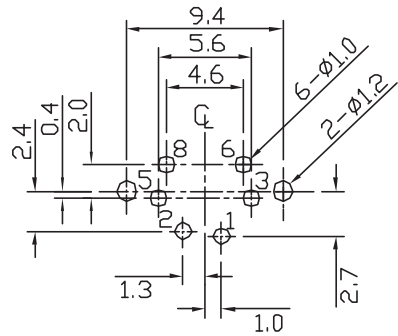
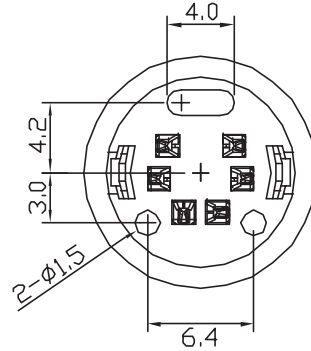
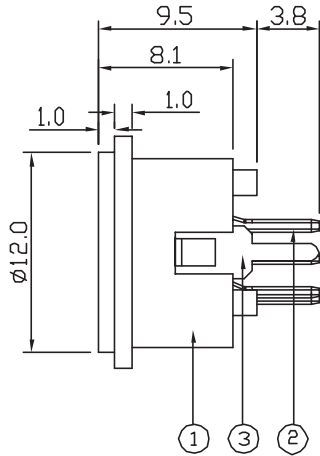


REV	DESCRIPTION	DATE
A0	Initial Release	07.11.28



COMPONENT SIDE
(PCB LAYOUT)



Specification:

Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 100M Ohm Min; AT 500V DC
 Rated Voltage And Current: DC12V, 2A Max; AC 100V, 1A Max
 Dielectric Withstanding Voltage: 250V AC For 1 Minute.
 Durability (Life Test): 100 Cycles
 Insertion Force: 4.0KG Maximum.
 Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	CONTACT TERM.	PHOS. BRONZE T:0.2	SILVER PLATED	6	SILVER:20~30u'
3	GROUND TERM.	BRASS T:0.3	TIN PLATED	1	TIN:120~200u'

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		MINI DIN JACK VERTICAL				APPROVED	
PART NO:		MD6F0102K00E-2				DRAW NO	
DRAW. BOX NO:							
SCALE		1:1	REV	A0	UNIT	mm	

TOLERANCE	
X.	±0.08
x.	±0.05
.XX	±0.13
.XXX	±0.05