

REV	DESCRIPTION	APPROVAL	DATE
	新制定		06.12.26

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1 Amp



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

◆ Terminated with 1.27mm pitch flat ribbon cable.

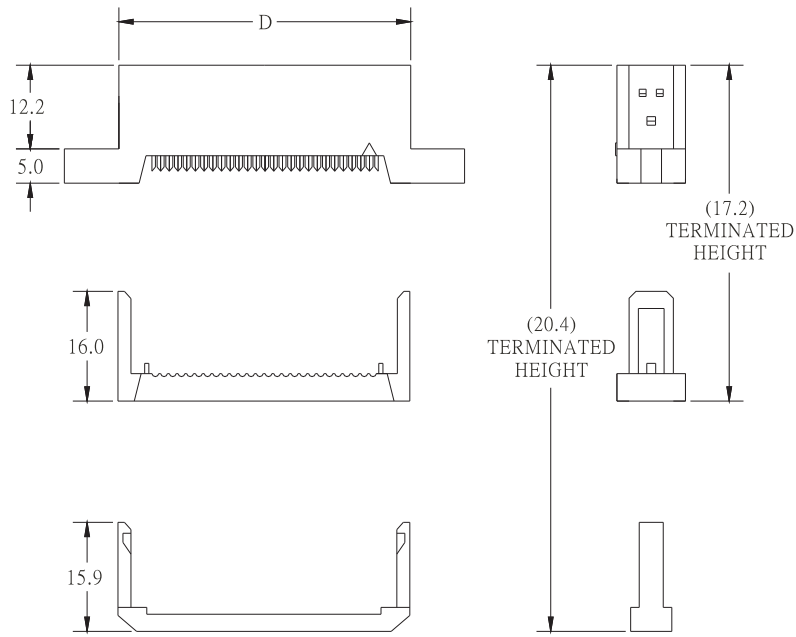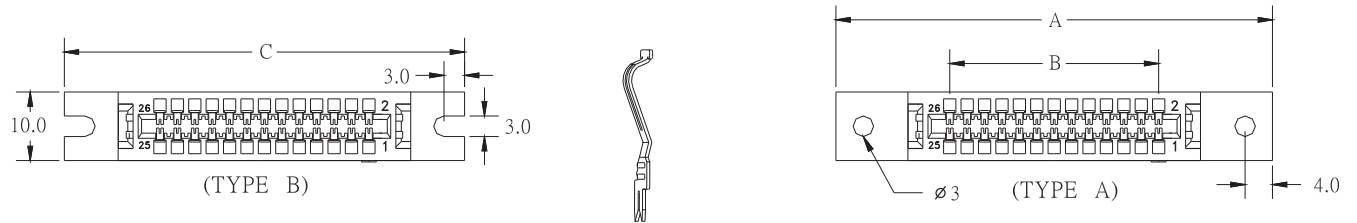

POSITION	A	B	C	D
10	43.06	10.16	38.06	22.36
14	48.14	15.24	43.14	27.44
16	50.68	17.78	45.68	29.98
20	55.76	22.86	50.76	35.06
26	63.38	30.48	58.38	42.68
34	73.54	40.64	68.54	52.84
40	81.16	48.26	76.16	60.46
50	93.86	60.96	88.86	73.16
60	106.56	73.66	101.56	85.86
62	109.10	76.20	104.10	88.40
64	111.64	78.74	106.64	90.94

 貝強實業有限公司 PANSTRONG COMPANY LTD.			DRAWN BY		TOMMY
			CHECKED		
TITLE:		EDGE CARD IDC TYPE WITH MONTING EAR		APPROVED	
PART NO:		CGDCxxF01K00E-2		DRAW NO	
DRAW. BOX NO:					
SCALE		REV		UNIT	mm
			