

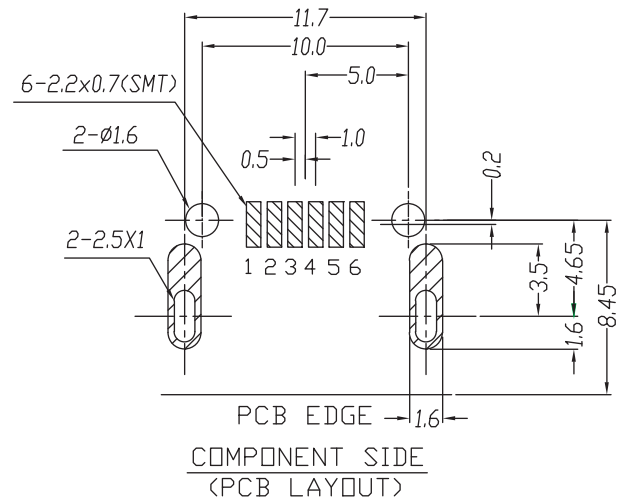
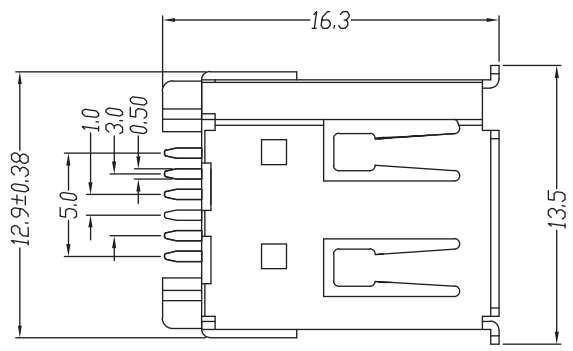


REV	DESCRIPTION	DATE
A	Initial Release	06'.04.12
B	Specification Update	06'.05.15

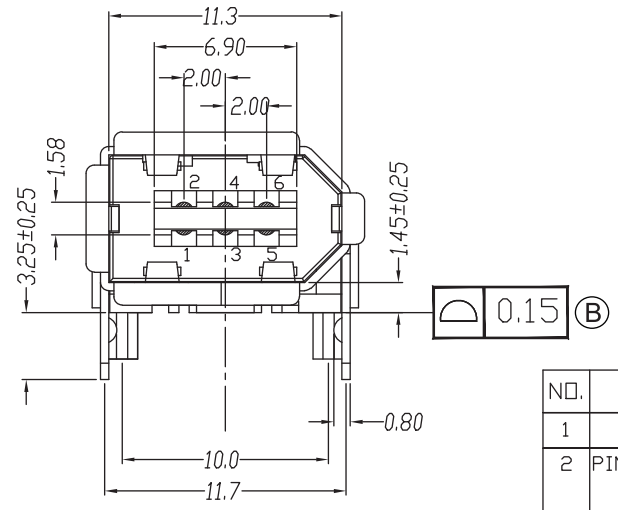

Specification:  
 Contact Resistance: 30m Ohm Max.  
 Insulation Resistance: 100M Ohm Min.  
 Voltage - Max:40V Maximum  
 Current - Max:1.5A Maximum.  
 Dielectric Withstanding Voltage:  
 500V AC for 1 Minute  
 Durability (Life Test): 1500 Cycles  
 Unmating Force:9.8 Newton TO 39.2 Newton Maximum.

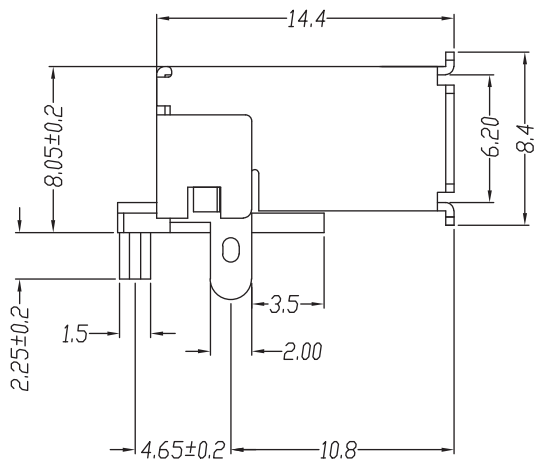

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	NYLON PA9T G.F.	BLACK		1
2	PIN TERMINAL	BRASS; t:0.25	GOLD/TIN PLATED	Gold:30u" NI:40~60 u" TIN:120u" <100% pure Tin of lead free plating>	6
3	SHELL	BRASS; t:0.4	NICKEL PLATED	NI:80~120u"	1

**Green Product**

TOLERANCE	
x.	±0.38
.x	±0.25
.xx	±0.13
.xxx	±0.05

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		IEEE 1394 A TYPE SOCKET				APPROVED	
PART NO:		FWR03B-6F-2				DRAWING NO.	
SCALE		1:1	REV	B	UNIT	mm	