

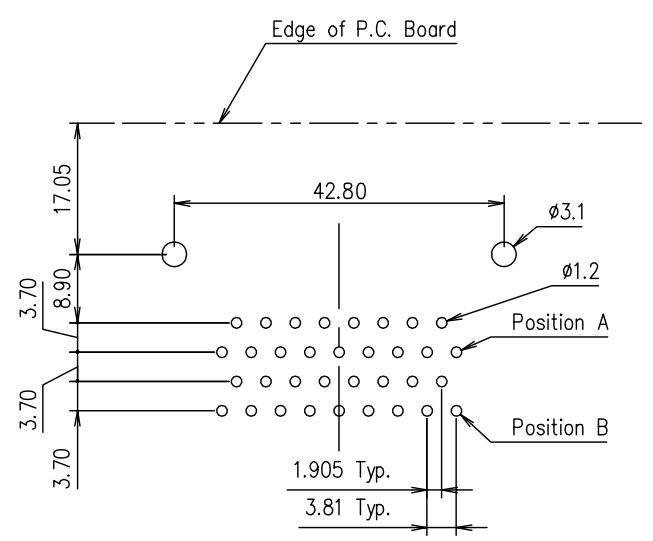



REV	DESCRIPTION	DATE
A	Initial Release	11.07.18

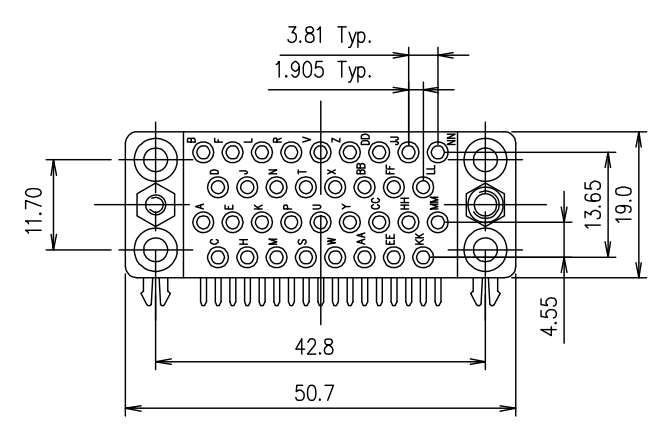

Mechanical
 Insulator Material
 PBT & Glass-fibre Feiaforced
 UL 94V-0
 Contact Phosphor Bronze
 Electrical
 Current Rating: 7AMP
 Dielectric Withstanding Voltage
 AC 1200Vmin(for 1 minute)
 Insulation Resistance
 1000Mn min. (at 500V DC)
 Contact Resistance
 35Mn max. mated
 Working Temperature:
 -55°C to +105°C

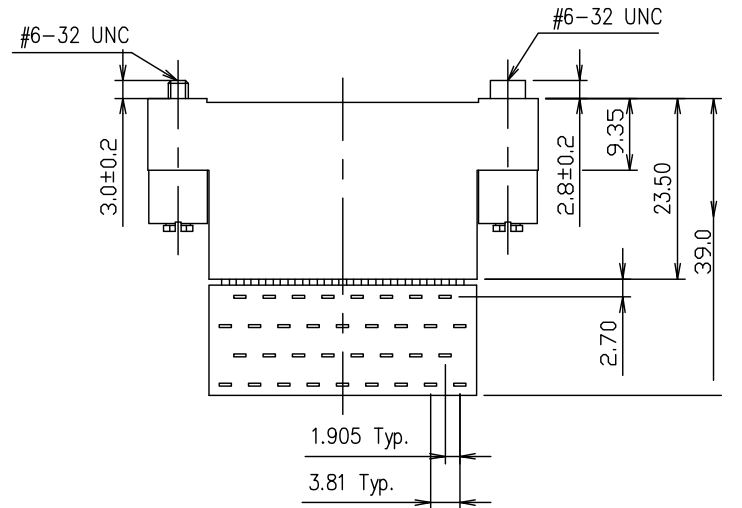

Recomanded P.C.B. Layout

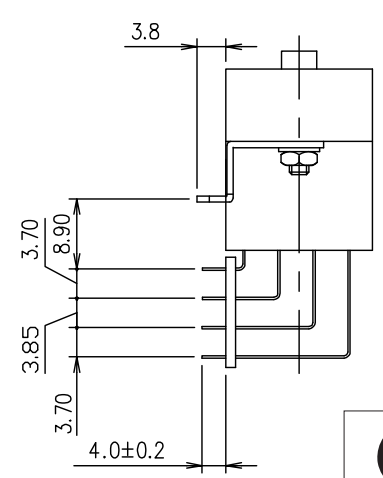

PART NO.
 V35F0101KxxHP-x C

Contact Length (MM)
 A: 2.6 B: 2.7 C: 2.8
 D: 3.0 E: 3.2 F: 4.75
 0: N/A

Contact Plating:
 A: Gold Flash B: 3u"
 C: 5u" D: 10u" E: 15u"
 F: 30u"

				DRAWN BY		TOMMY	
				CHECKED		TOMMY	
TITLE:		V.35 High Profile Female Though Hole, R/A, Full Inserted Pins		APPROVED		CAROL	
PART NO:		V35F0101KxxHP-xC				DRAWING NO.	
SCALE		/	REV	A	UNIT	mm	

SELECT	1	2	3	EXTRA
0.000	0.05	0.05	0.10	✓
0.00	0.10	0.15	0.20	✓
0.0	0.15	0.20	0.30	✓
0.	0.25	0.30	0.40	✓
ANGLE	1.0°	3.0°	5.0°	✓