

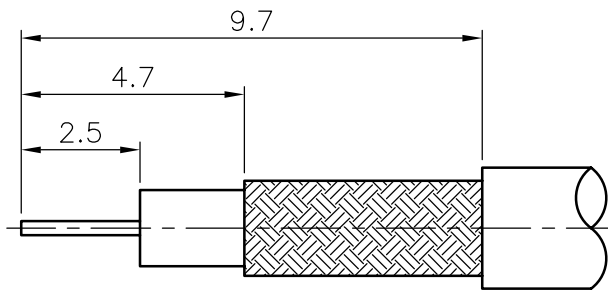
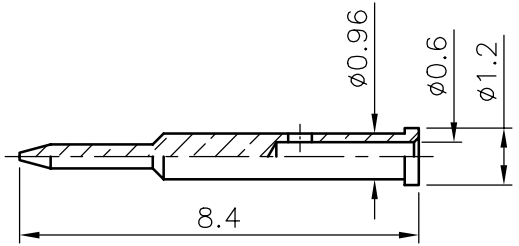


REV	DESCRIPTION	DATE
A	Initial Release	07.06.13

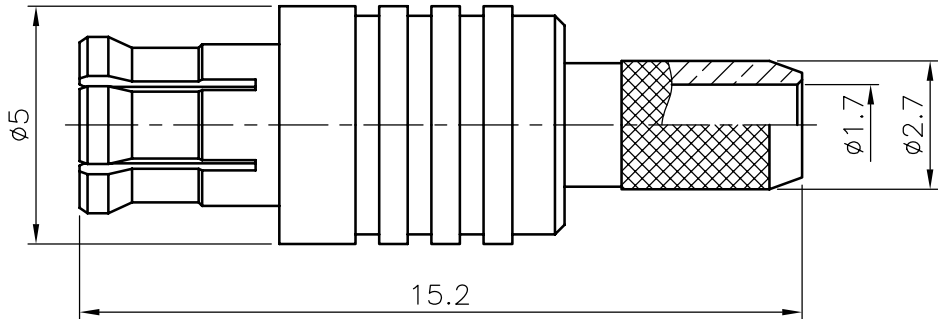

RECOMMENDED  
CABLE STRIPPING DIM'S

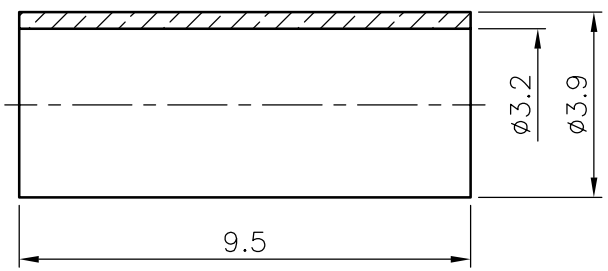

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)
2. CONTACT PIN TO SOLDER

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BERYLLIUM COPPER PER QQ-C-530
  6. BRASS JIS H 3250, C 2700

FERRULE	NOTE 6	NOTE 2
CONTACT PIN	NOTE 1	NOTE 3
CONTACT BODY	NOTE 5	NOTE 2
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6	= ±0.2
>6-30	= ±0.4
>30-120	= ±0.6
>120-315	= ±1
>315-1000	= ±1.6
ANGLES	= ±5°

<b>PANSTRONG COMPANY LTD.</b>	<b>DRAWN BY</b>	<b>TOMMY</b>
	<b>CHECKED</b>	
<b>TITLE:</b>	MCX CRIMP PLUG (FOR RG174/U,188A/U,316/U)	
<b>PART NO:</b>	XM02G0111	
<b>File Number:</b>		
<b>SCALE</b>	<b>6:1</b>	<b>REV</b> <b>A</b>
<b>UNIT</b>	<b>mm</b>	