
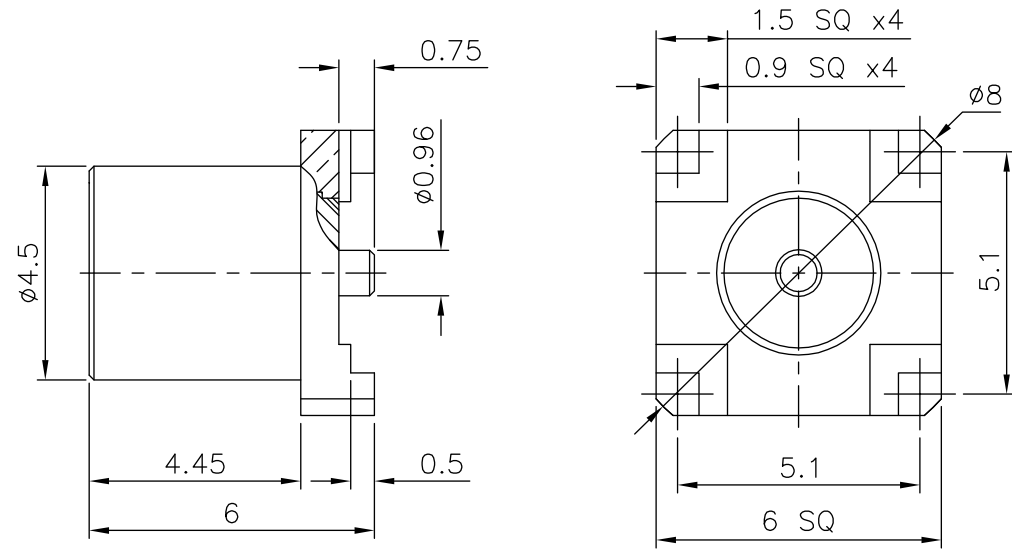


| REV | DESCRIPTION | DATE |
|-----|-----------------|-----------|
| A | Initial Release | 10'.06.03 |

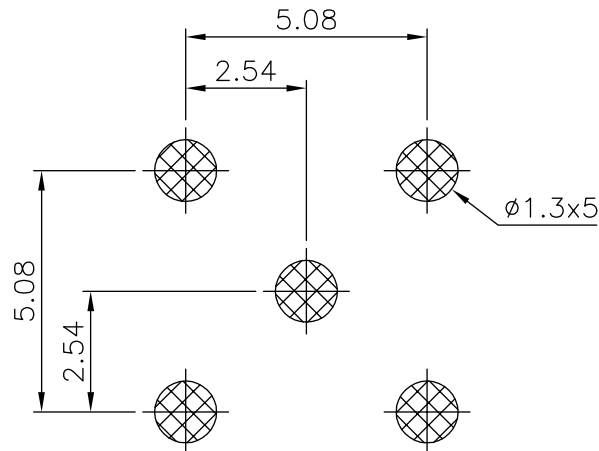

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. TEFLON MIL-P-19468
 4. PHOSPHOR BRONZE PER QQ-B-750

| | | |
|-------------|----------|--------|
| CONTACT PIN | NOTE 4 | NOTE 2 |
| INSULATOR | NOTE 3 | WHITE |
| BODY | NOTE 1 | NOTE 2 |
| DESCRIPTION | MATERIAL | FINISH |





RECOMMENDED
SOLDERING PADS

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES

| | |
|-----------|--------|
| 0.5-6 | = ±0.2 |
| >6-30 | = ±0.4 |
| >30-120 | = ±0.6 |
| >120-315 | = ±1 |
| >315-1000 | = ±1.6 |
| ANGLES | = ±5° |

RoHS COMPLIANT

| | | |
|---|--------------|---|
|  PANSTRONG COMPANY LTD. | DRAWN BY | TOMMY |
| | CHECKED | |
| TITLE: | MCX SMT JACK | |
| PART NO: | XF02G0103 | |
| File Number: | | |
| SCALE | 6:1 | REV A |
| UNIT | mm |  |