

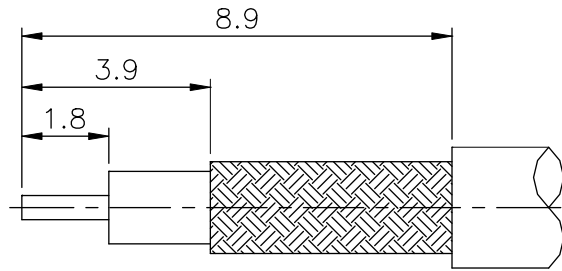


REV	DESCRIPTION	DATE
A1	Initial Release	06'.08.02


REMARK: RoHS COMPLIANT

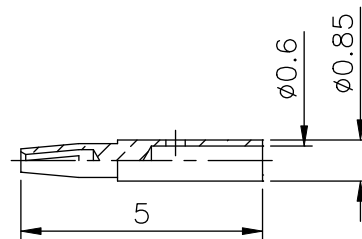

RECOMMENDED  
CABLE STRIPPING DIM'S

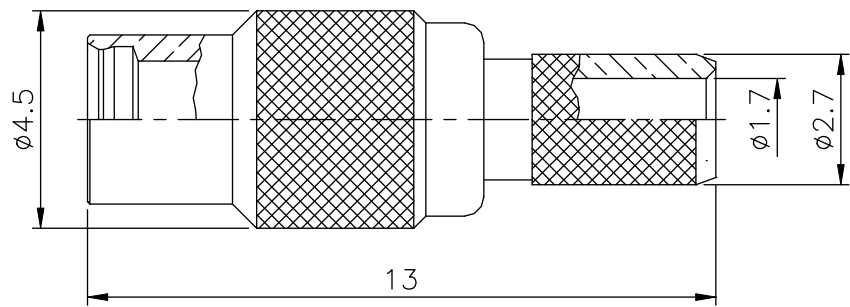

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  - GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468
  - BERYLLIUM COPPER PER QQ-C-530
  - BRASS JIS H 3250, C 2700
  - GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE

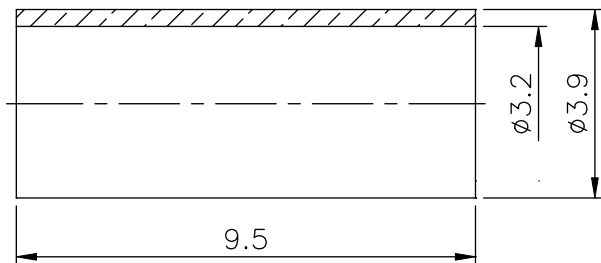

- CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)
- CONTACT PIN TO SOLDER

FERRULE	NOTE 6	NOTE 7
CONTACT PIN	NOTE 5	NOTE 3
BRAID HOLDER	NOTE 1	NOTE 2
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES

0.3-6	= ±0.2
>6-25	= ±0.4
>30-120	= ±0.6
>120-315	= ±1
>315-1000	= ±1.6
ANGLES	= ±5°

<b>PANSTRONG COMPANY LTD.</b>				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		MMCX CRIMP PLUG (FOR RG-174/U,188A/U,316/U)				APPROVED	
PART NO:		MXM02G0111R				DRAW NO	
File Number:							
SCALE	6:1	REV	A1	UNIT	mm		