

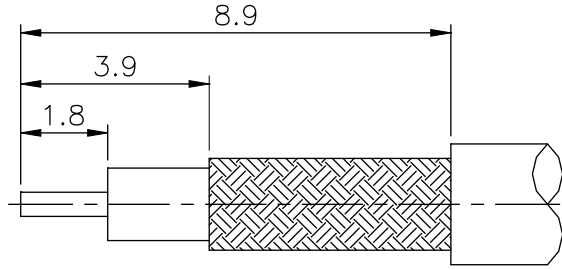
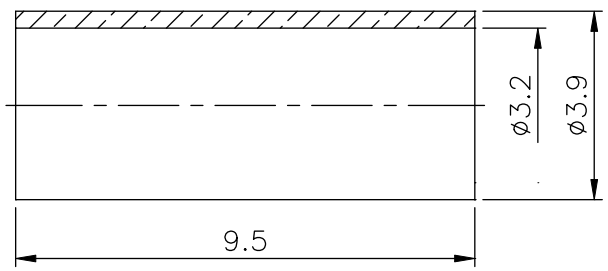


REV	DESCRIPTION	DATE
A1	Initial Release	06.08.02

REMARK: RoHS COMPLIANT

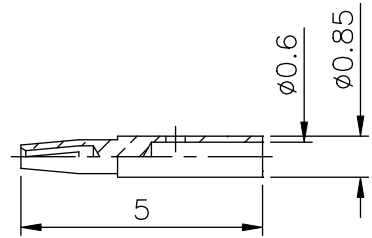

RECOMMENDED
CABLE STRIPPING DIM'S

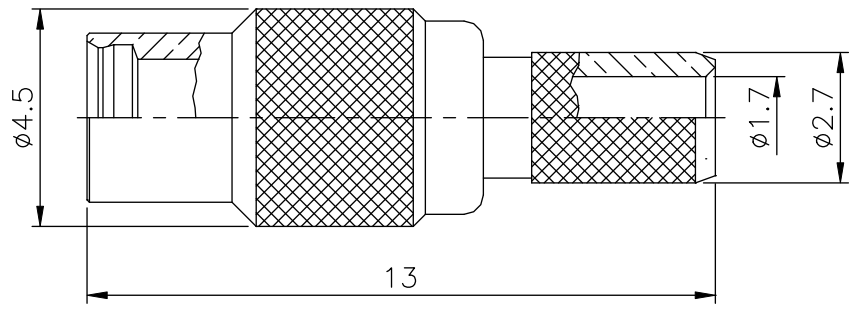

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
2. CONTACT PIN TO SOLDER

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BERYLLIUM COPPER PER QQ-C-530
 6. BRASS JIS H 3250, C 2700
 7. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE

FERRULE	NOTE 6	NOTE 7
CONTACT PIN	NOTE 5	NOTE 3
BRAID HOLDER	NOTE 1	NOTE 2
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5~6	= ±0.2
>6~30	= ±0.4
>30~120	= ±0.6
>120~315	= ±1
>315~1000	= ±1.6
ANGLES	= ±5°

	PANSTRONG COMPANY LTD.			DRAWN BY	TOMMY
				CHECKED	
TITLE:	MMCX CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)			APPROVED	
PART NO:	MXF02G0111R			DRAW NO	
File Number:					
SCALE	6:1	REV	A1	UNIT	mm