



REMARK: RoHS COMPLIANT

REV	DESCRIPTION	DATE
A	Initial Release	06'.08.16

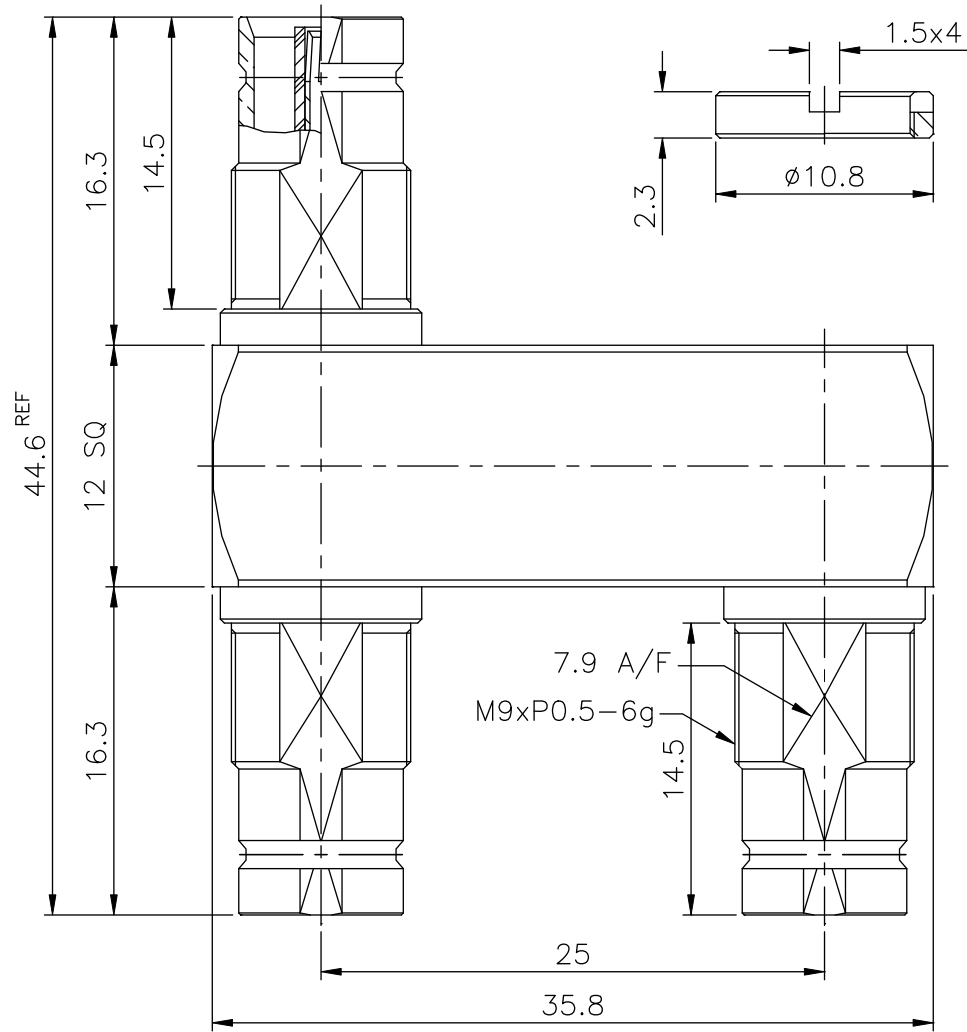

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  - GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468
  - PHOSPHOR BRONZE PER QQ-B-750



RECOMMENDED MOUNTING HOLE

NUT	NOTE 1	NOTE 2
COVER	NOTE 1	NOTE 2
BODY	NOTE 1	NOTE 3
INSULATOR	NOTE 4	WHITE
CONTACT PIN	NOTE 5	NOTE 3
CONTACT PIN	NOTE 1	NOTE 3
INSULATOR	NOTE 4	WHITE
CUBE BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

1. MAX. PANEL THICKNESS=2.5mm

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-5 =  $\pm 0.2$   
 >5-30 =  $\pm 0.4$   
 >30-120 =  $\pm 0.6$   
 >120-315 =  $\pm 1$   
 >315-1000 =  $\pm 1.6$   
 ANGLES =  $\pm 5^\circ$

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		1.6/5.6 BULKHEAD CRIMP JACK (FOR RG-179/U,179B/U,187A/U)				APPROVED	
PART NO:		1656F/2F				DRAWING NO.	
SCALE		2.5:1	REV	A	UNIT	mm	