

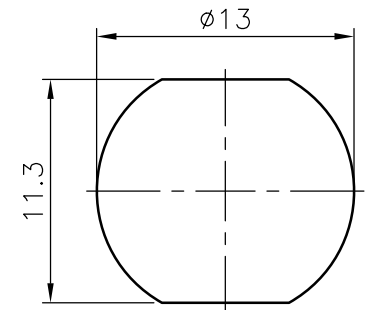
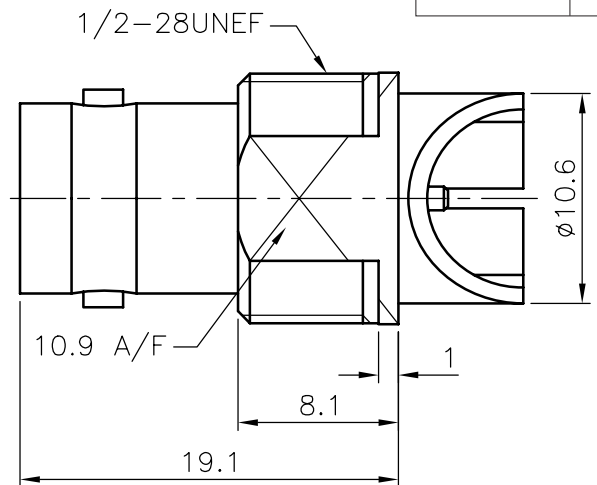
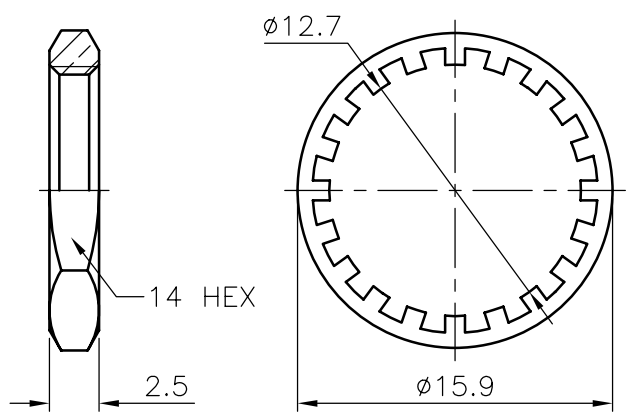


REV	DESCRIPTION	DATE
A	Initial Release	07.05.22

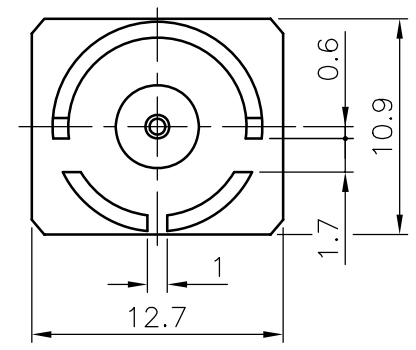

RECOMMENDED MOUNTING HOLE

- REMARK: 1. RoHS COMPLIANT
 2. VSWR 1.433 MAX. UP TO 3GHz
 3. RETURN LOSS: -15dB MAX. UP TO 3GHz
 4. WITHSTAND WAVE SOLDERING TEMPERATURE: 265°C

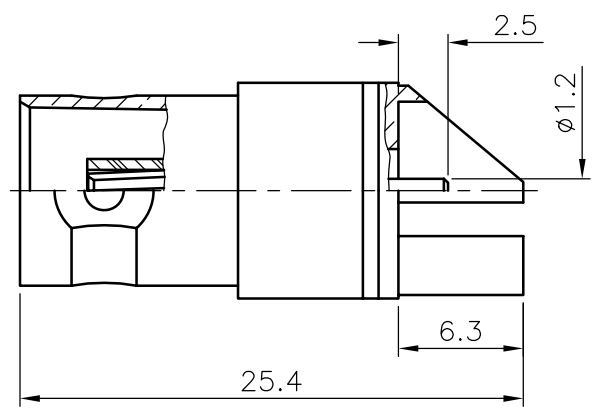

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. TEFLON MIL-P-19468
 4. PHOSPHOR BRONZE PER QQ-B-750
 5. NICKEL PL 70 MIN THICK OVER COPPER STRIKE

DESCRIPTION	MATERIAL	FINISH
NUT	NOTE 1	NOTE 5
WASHER	SS41	NOTE 5
CONTACT PIN	NOTE 4	NOTE 2
INSULATOR	NOTE 3	WHITE
BODY	NOTE 1	NOTE 5

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5~6	= ±0.2
>6~30	= ±0.4
>30~120	= ±0.6
>120~315	= ±1
>315~1000	= ±1.6
ANGLES	= ±5°

PANSTRONG COMPANY LTD.				DRAWN BY	TOMMY
				CHECKED	
TITLE:	BNC END LAUNCH JACK(75 ohms)			APPROVED	
PART NO:	BF02N0119-B			DRAW NO	
File Number:					
SCALE	2.5:1	REV	A	UNIT	mm