


REV	DESCRIPTION	DATE
A	Initial Release	06'.08.25
B	Change the material of Gasket part from Rubber to Silicone, update the stripped dimension	07'.04.30

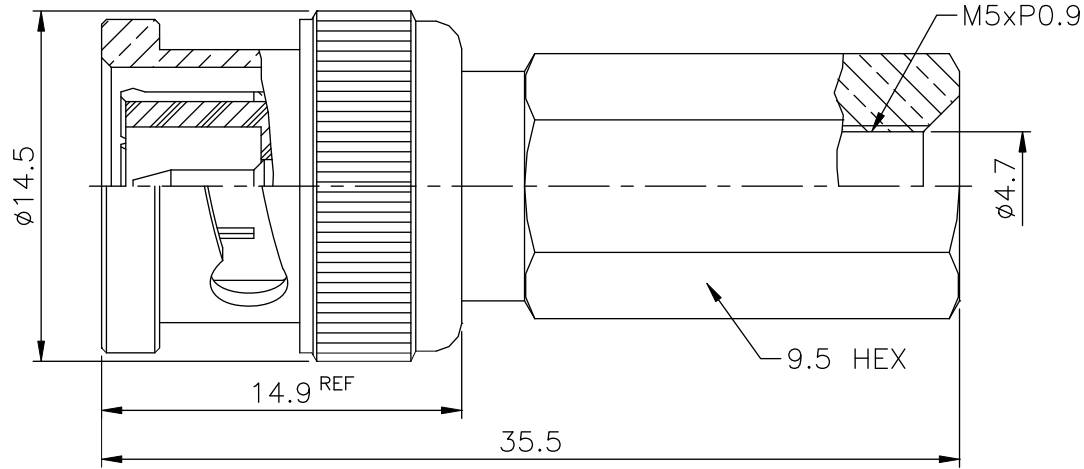

FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE  
 3. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE

SHELL	NOTE 1	NOTE 2
GASKET	SILICONE	RED
C RING	SS41	NOTE 2
SPRING	SK5	NOTE 2
WASHER	SS41	NOTE 2
INSULATOR	DELRIN	WHITE
CONTACT PIN	NOTE 1	NOTE 3
INSULATOR	P.P	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

RECOMMENDED  
CABLE STRIPPING DIM'S

RoHS COMPLIANT

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES

0.5-6 = ±0.2  
 >6-30 = ±0.4  
 >30-120 = ±0.6  
 >120-315 = ±1  
 >315-1000 = ±1.6  
 ANGLES = 25°

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		BNC TWIST ON PLUG (FOR RG-58/U)				APPROVED	
PART NO:		BM02N0216				DRAWING NO.	
SCALE		3:1		REV		B	
UNIT		mm					