




REV	DESCRIPTION	DATE
A1	Initial Release	08'.02.18

REMARK: RoHS COMPLIANT


- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BRASS JIS H 3250, C 2700
 6. PHOSPHOR BRONZE PER QQ-B-750

DESCRIPTION	MATERIAL	FINISH
FERRULE	NOTE 5	NOTE 2
CONTACT PIN	NOTE 6	NOTE 3
LOCK RING	NOTE 1	NOTE 2
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2

1. CRIMPED FERRULE
HEX CRIMP SIZE .213" (5.41mm)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)

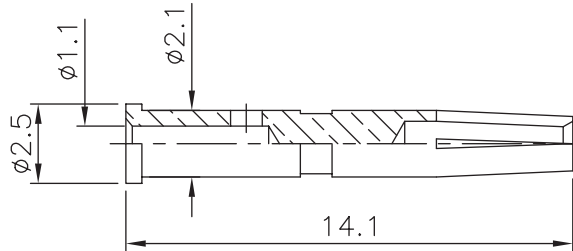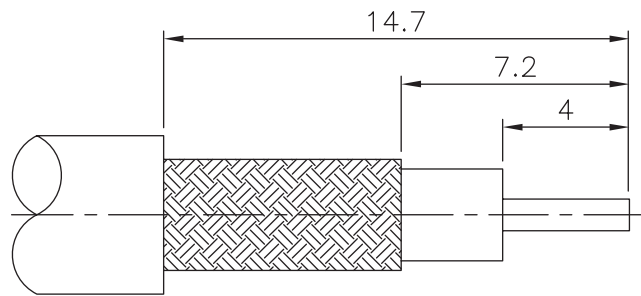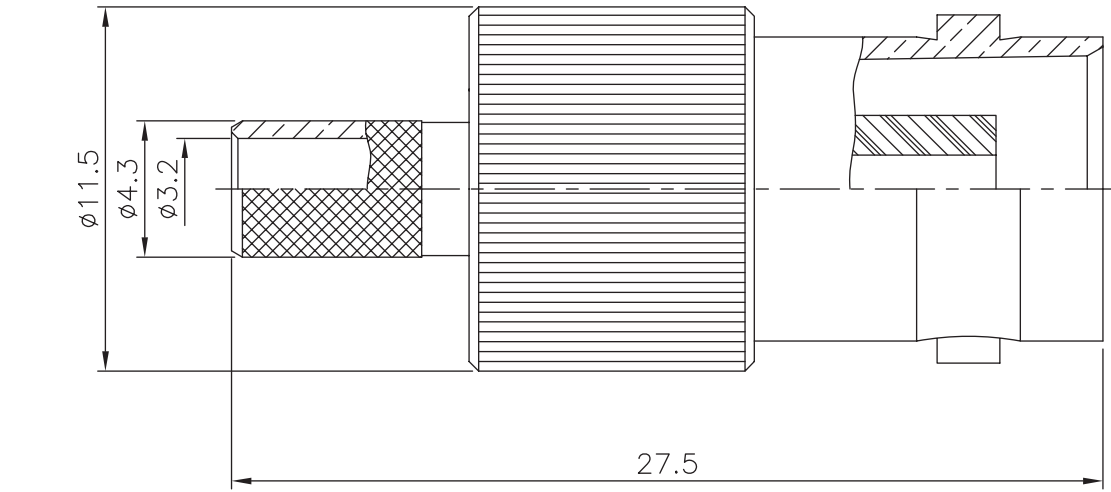

RECOMMENDED
CABLE STRIPPING DIM'S

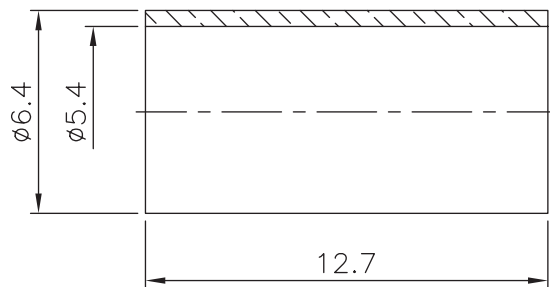

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5~6	= ±0.2
>6~30	= ±0.4
>30~120	= ±0.6
>120~315	= ±1
>315~1000	= ±1.6
ANGLES	= ±5°

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		BNC CRIMP JACK (FOR RG-58C/U, 58/U, LMR-195)				APPROVED	
PART NO:		BF02N0211				DRAW NO	
File Number:							
SCALE	4:1	REV	A1	UNIT	mm		