

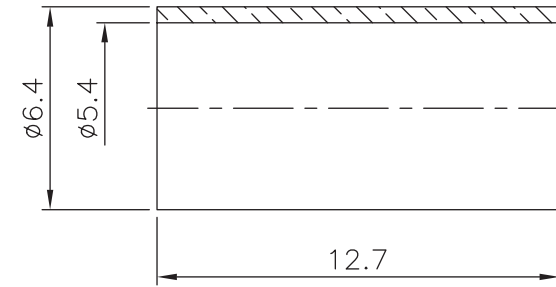


REMARK: RoHS COMPLIANT

REV	DESCRIPTION	DATE
A1	Initial Release	08'.02.18

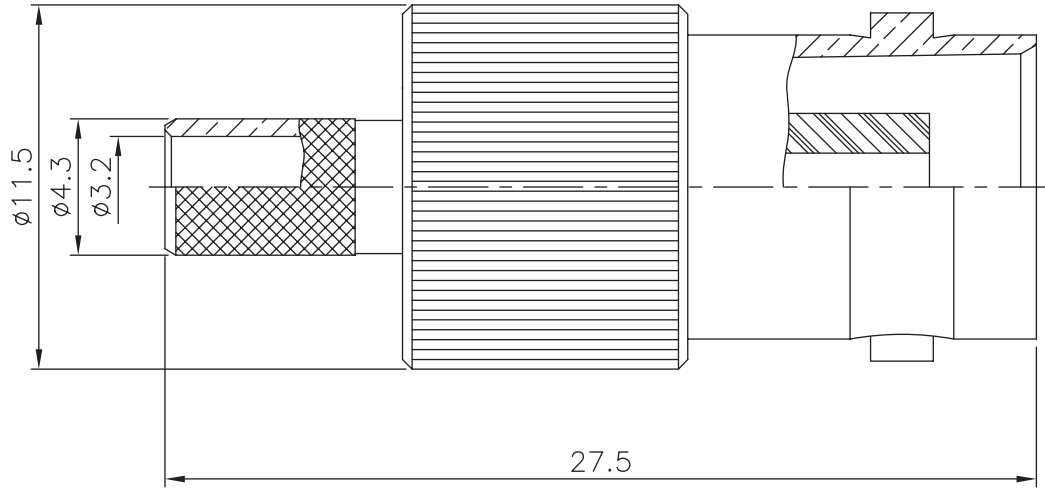


- FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BRASS JIS H 3250, C 2700
  6. PHOSPHOR BRONZE PER QQ-B-750

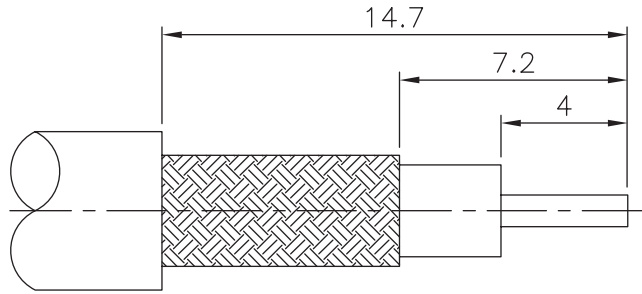

RECOMMENDED  
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213" (5.41mm)
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068" (1.72mm)

FERRULE	NOTE 5	NOTE 2
CONTACT PIN	NOTE 6	NOTE 3
LOCK RING	NOTE 1	NOTE 2
INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

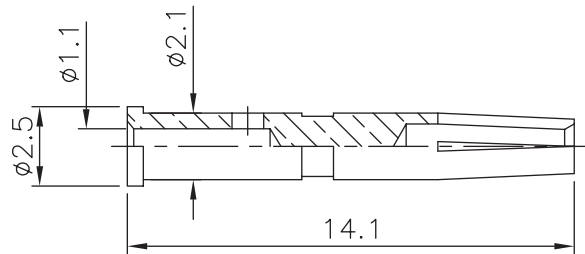

UNLESS OTHERWISE SPECIFIED  
TOLERANCES

0.5~6	= ±0.2
>6~30	= ±0.4
>30~120	= ±0.6
>120~315	= ±1
>315~1000	= ±1.6
ANGLES	= ±5°

<b>PANSTRONG COMPANY LTD.</b>		DRAWN BY		TOMMY	
		CHECKED			
TITLE:		BNC CRIMP JACK (FOR RG-58C/U,58/U,LMR-195)			
PART NO:		BF02N0212			
File Number:					
SCALE		4:1	REV	A1	
UNIT		mm			