


P.C.B LAYOUT

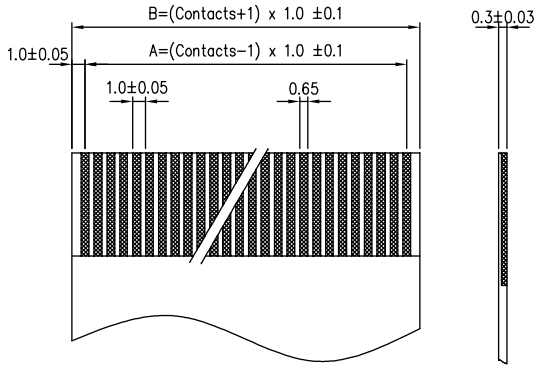

RoHS Compliant

SPEC :


- Housing: UL94V-0
Initial: 500M Ohms Min.
Color: Black
- Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Tin/Lead-Plated
Voltage Rating: 50V AC,DC
- Temperature Rating : -25°C ~ +85°C
- Dielectric Withstanding Voltage : 500V AC/Min

PART NO.

FPxxH43-C03SKNB * *
1 2 3

- Contact Position: 04..40
- Contact Plating:
Blank: Tin
G : Flash Gold
- Package:
T: Tube
R: Tape & Reel

No. of Contacts	DIMENSION			No. of Contacts	DIMENSION		
	A	B	C		A	B	C
4	3.0	5.0	6.0	23	22.0	24.0	25.0
5	4.0	6.0	7.0	24	23.0	25.0	26.0
6	5.0	7.0	8.0	25	24.0	26.0	27.0
7	6.0	8.0	9.0	26	25.0	27.0	28.0
8	7.0	9.0	10.0	27	26.0	28.0	29.0
9	8.0	10.0	11.0	28	27.0	29.0	30.0
10	9.0	11.0	12.0	29	28.0	30.0	31.0
11	10.0	12.0	13.0	30	29.0	31.0	32.0
12	11.0	13.0	14.0	31	30.0	32.0	33.0
13	12.0	14.0	15.0	32	31.0	33.0	34.0
14	13.0	15.0	16.0	33	32.0	34.0	35.0
15	14.0	16.0	17.0	34	33.0	35.0	36.0
16	15.0	17.0	18.0	35	34.0	36.0	37.0
17	16.0	18.0	19.0	36	35.0	37.0	38.0
18	17.0	19.0	20.0	37	36.0	38.0	39.0
19	18.0	20.0	21.0	38	37.0	39.0	40.0
20	19.0	21.0	22.0	39	38.0	40.0	41.0
21	20.0	22.0	23.0	40	39.0	41.0	42.0
22	21.0	23.0	24.0				

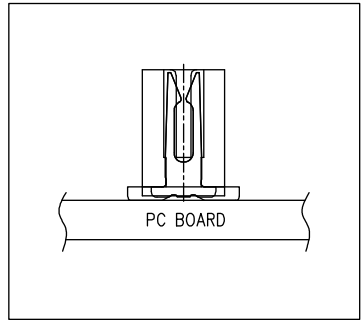

PANSTRONG COMPANY LTD.

DRAWN BY TOMMY

CHECKED

TITLE:

FPC P1.0 H4.5 SMT Vertical Non-ZIF Cross Pin Type B(4-40 Pin)

APPROVED

PART NO:

FPxxH43-C03SKUNBxx

DRAWING NO. FPCC-01045SN-xxx-2

SCALE


4:1

REV

A

UNIT

mm



General Tolerance	
X.±	0.50
.X±	0.30
.XX±	0.20
.XXX±	0.10