


REV	DESCRIPTION	DATE
A	Initial Release	05.11.11

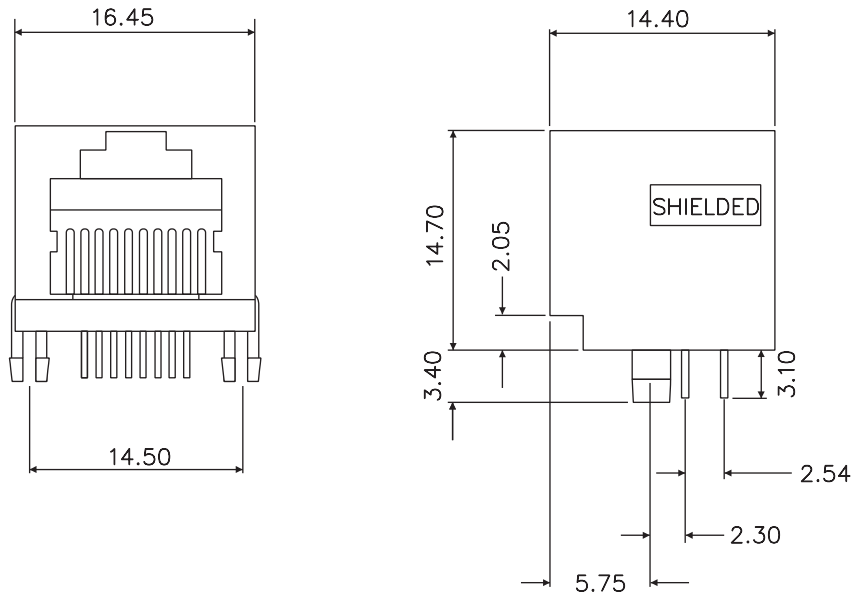

SPECIFICATIONS

MATERIAL:


1. Housing: PBT Polyester UL94V0
2. Color: Black
3. Contacts: 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield: 0.20mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating: 1.5 AMP
2. Voltage Rating: 150 VAC
3. Contact Resistance: 20 Milliohms MAX
4. Insulation Resistance: 500 Milliohms MIN
5. Dielectric Withstanding Voltage: 1000 VAC, 1 min.

PART NO. MJSC2L4-880101K06

- └ Contact Gold Plating
- 06: 6u" Gold
- :
- 50: 50u" Gold

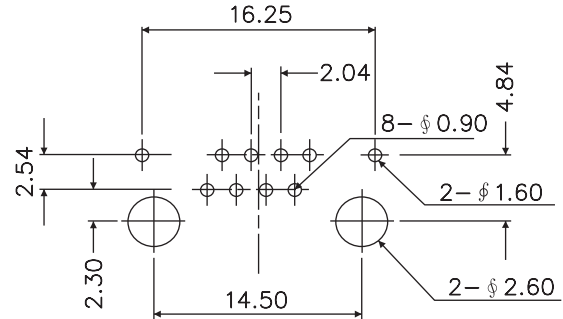

PCB LAYOUT/TOP VIEW

	PANSTRONG COMPANY LTD.			DRAWN BY	TOMMY
				CHECKED	
TITLE:	8P SIDE ENTRY SHIELDED MODULAR JACK			APPROVED	
PART NO:	MJSC2L4-880101K			DRAW NO	
File Number:					
SCALE	/	REV	A	UNIT	mm