



REV	DESCRIPTION	APPROVAL	DATE
A	Initial Release		07.08.01

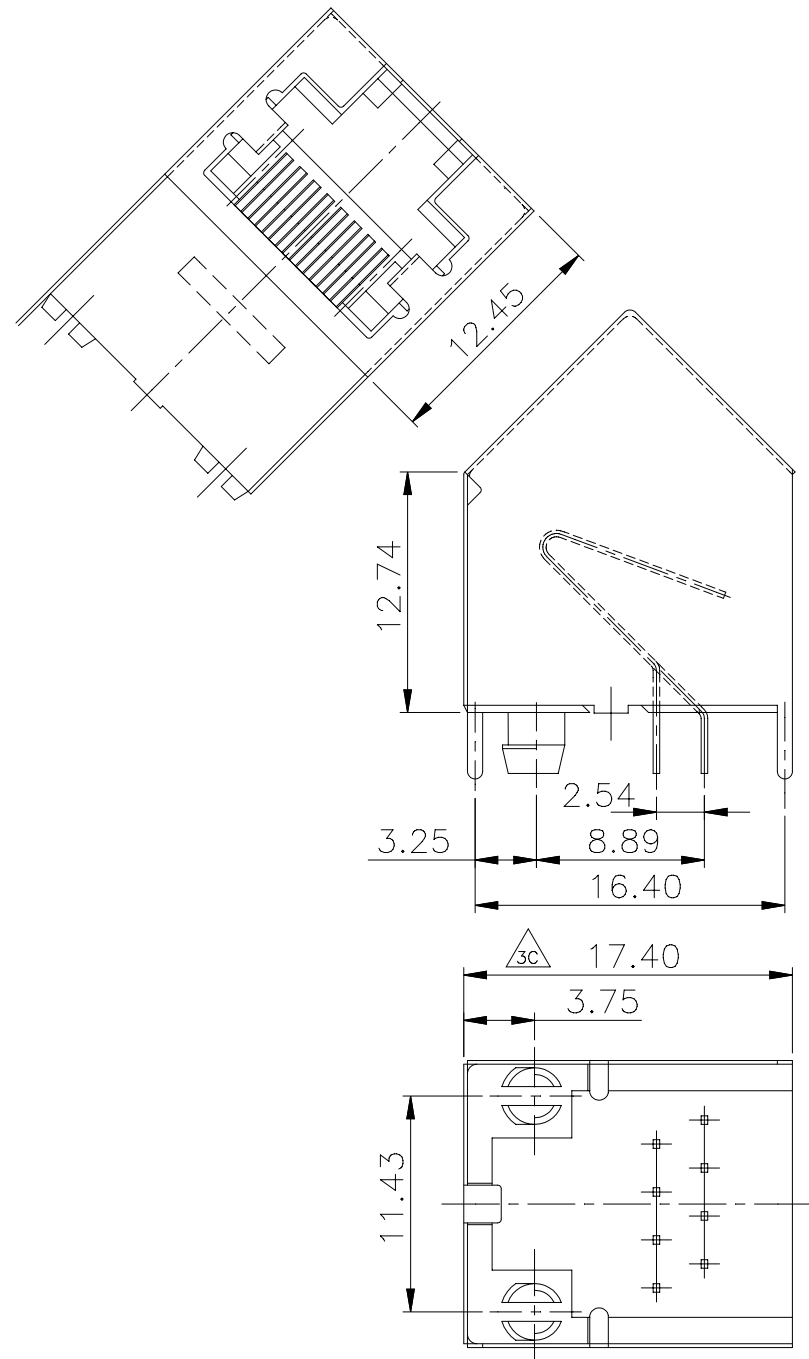

※ △ : Q.C. Dimensions

TOLERANCE	
.XXX	±0.10
.XX	±0.25
.X	±0.38
X	±0.50
ANG	±3°

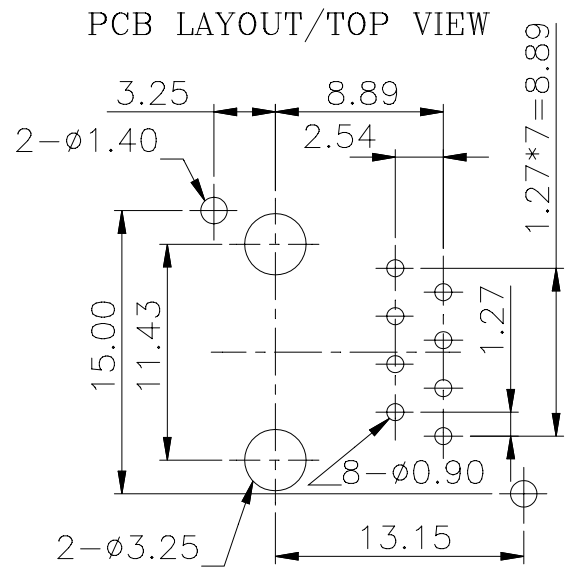

MATERIALS:  
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
 FLAMMAGILITY RATING UL 94V-0.  
 CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE  
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.  
 SHIELDED: BRASS WITH NICKEL PLATED

MJS880105W01

Contact Gold Plating  
 01 : Gold Flash  
 06 : 6u" Gold  
 50 : 50u" Gold

PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		45° RJ45 PCB JACK (8P8C SHIELDED)				APPROVED	
PART NO:		MJS880105W				DRAW NO	
File Number:							
SCALE	2.5:1	REV	A	UNIT	mm		