
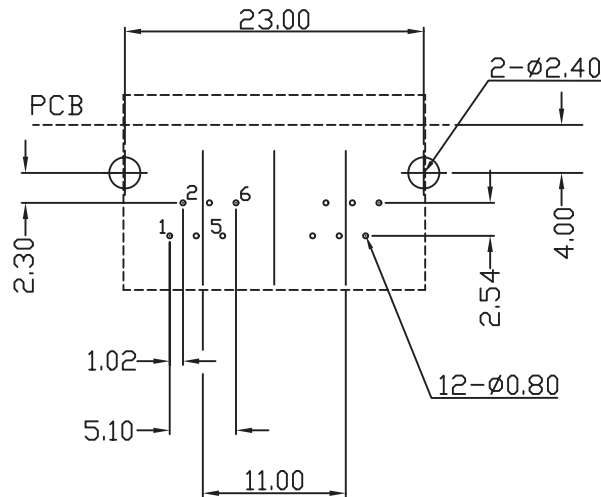

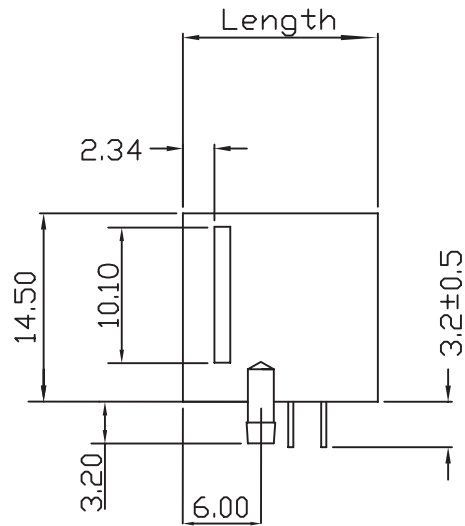


REV	DESCRIPTION	DATE
A	Initial Release	03'.07.28

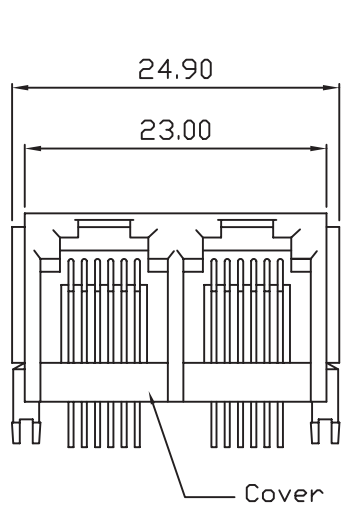

PCB LAYOUT/TOP VIEW

TOLERANCE	
.X	±0.3
.XX	±0.20

**SPECIFICATIONS**

**MATERIAL:**

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

**ELECTRICAL:**

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

Part No. MJL4E-660101Kxx-2

Contact Gold Plating:  
06: 6u" Selective Gold  
:  
50: 50u" Selective Gold

<b>PANSTRONG COMPANY LTD.</b>				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		6P Twin Type Low Profile Modular Jack				APPROVED	
PART NO:		MJL4E-660101Kxx-2				DRAW NO	
File Number:							
SCALE	Free	REV	A	UNIT	mm		