
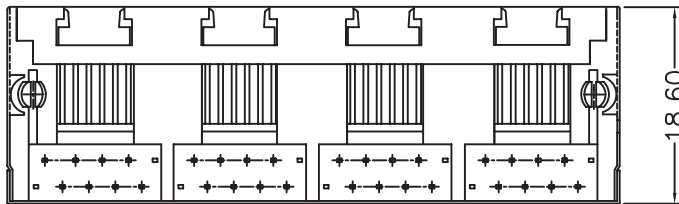



REV	DESCRIPTION	DATE
A	Initial Release	07.03.28

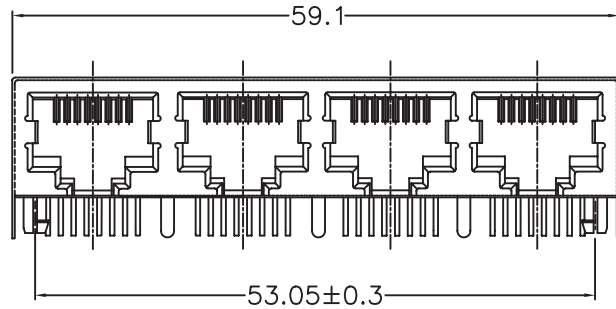

**SPECIFICATIONS**

**MATERIAL:**

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.20mm Thickness Copper Alloy With Nickel Plated


**ELECTRICAL:**

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

Part No.

MJSL2-8801FKxx-4

Contact Gold Plating:  
 03: 3u" Selective Gold  
 06: 6u" Selective Gold  
 15: 15u" Selective Gold  
 30: 30u" Selective Gold  
 50: 50u" Selective Gold

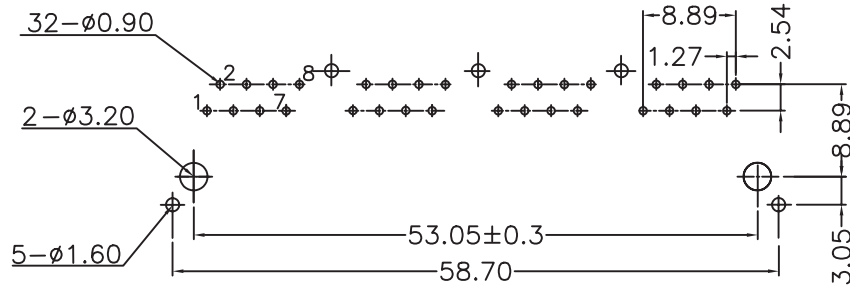

PCB LAYOUT/TOP VIEW

TOLERANCE
.X ±0.3
.XX ±0.20

<b>PANSTRONG COMPANY LTD.</b>	DRAWN BY	TOMMY
	CHECKED	
TITLE:	Side Entry Very L/P Shielded Gang Jack(4 Port)	
PART NO:	MJSL2-8801FKxx-4	
File Number:		
SCALE	Free	REV A
UNIT	mm	