

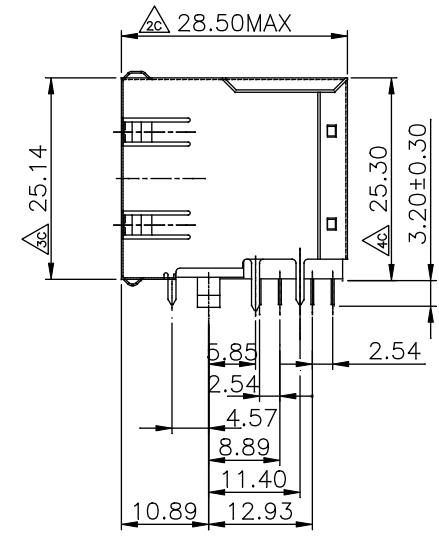
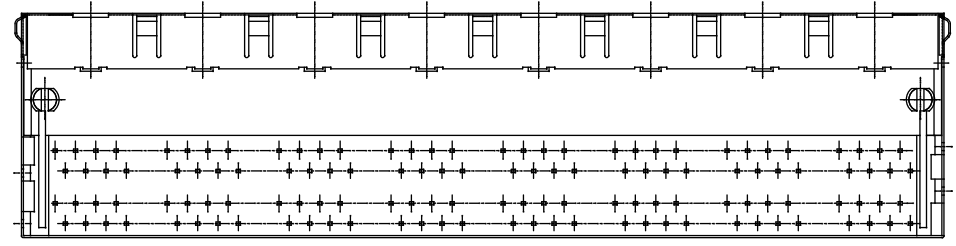


REV	DESCRIPTION	DATE
A	Initial Release	07'.07.05

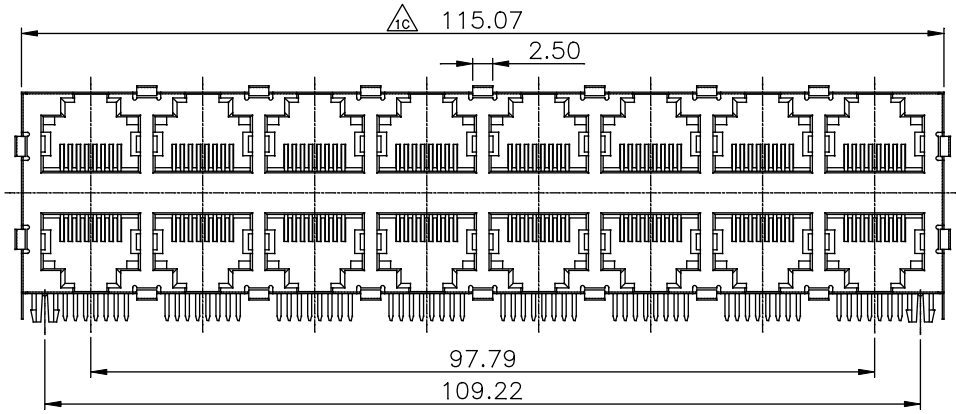

PCB LAYOUT/TOP VIEW

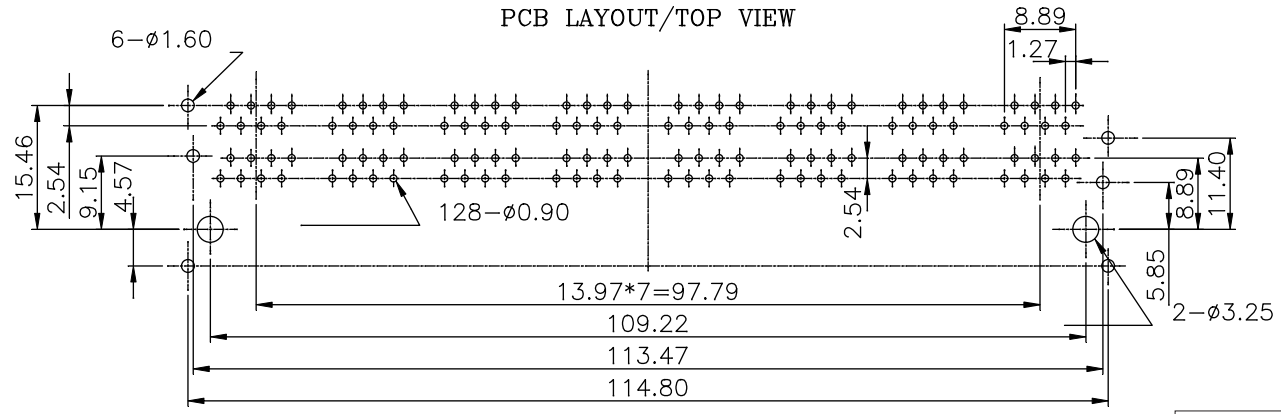

PART NO.
MJS 8 8 01 K 06 - 2 x 8 T 3
1 2 3 4 5 6

1. Modular Jack Shielded
2. Number of Position: 8
3. Number of Contact: 8
4. 01: Thru-Hole
5. Housing Color:
K: Black
6. Gold Plating on Contact:
06: 6u", 15: 15u", 30: 30u", 50: 50u"

※ \triangle : Q.C Dimensions

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0. (BLACK)
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELD: BRASS ALLOY.

RoHS COMPLIANT

TOLERANCE	
.XXX	±0.10
.XX	±0.25
.X	±0.38
X	±0.50
ANG	±3°

	PANSTRONG COMPANY LTD.			DRAWN BY	TOMMY
				CHECKED	
TITLE:	2x8 PCB JACK(SHIELDED 8P8C)			APPROVED	
PART NO:	MJS8801KXX-2x8T3			DRAW NO	3022815605
File Number:				UNIT	mm
SCALE	1.8:1	REV	A		