
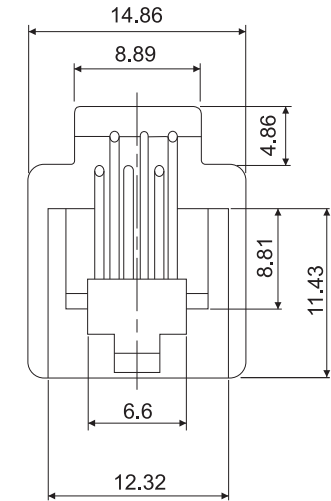
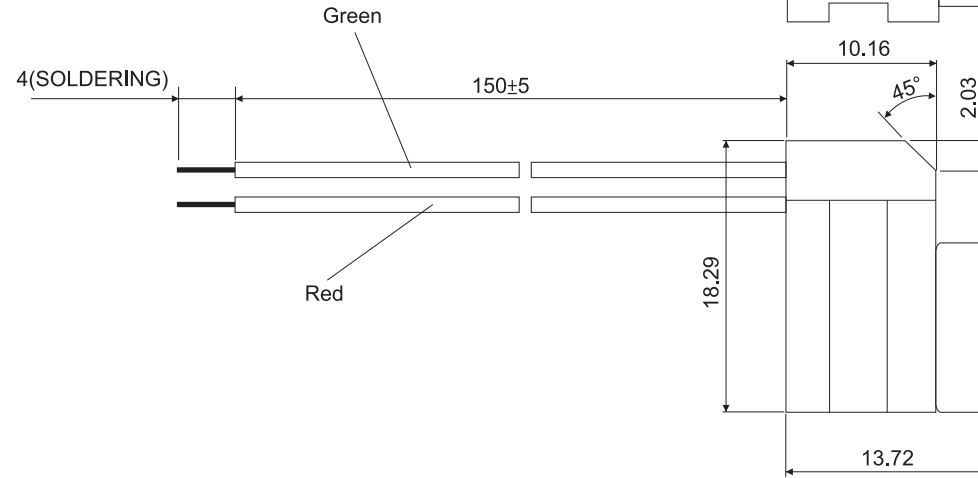


REV	DESCRIPTION	DATE
A	Initial Release	01.05.04

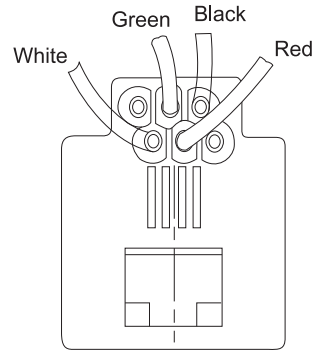

**NOTE:**

- 1.MATERIAL:HOUSING-ABS RESIN UL94V-0  
CONTACT:0.46mm DIAMETER  
PHOS-BRONZE GOLD PLATING OVER NICKEL.  
TERMINAL-0.4mm THICKNESS 3/4 HARD BRASS, 2.5mm<SOLDER(TIN-LEAD).  
WIRE STYLE-UL 1061 VW-1, 26AWG, PVC INSULATION
- 2.CAVITY CONFIRMS TO FCC RULES AND REGULATION PART, SUBPAPT F.

**ELECTRICAL CHARACTERISTICS:**

INSULATION RESISTANCE-5000M OHMS MIN.  
WITHSTAND VOLTAGE-AC 500V 1 MINUTE  
CONTACT RESISTANCE-50m OHMS MAX.  
RATING CURRENT-1.5A MAX.

**MECHANICAL CHARACTERISTICS:**

MATING FORCFE-350 Grams---2 Wire lead  
-500 Grams---4 Wire lead  
-750 Grams---6 Wire lead  
RETENTION STRENGTH-7.7Kg(17 Lbs) BETWEEN JACK AND PLUG  
CRIMP TENSILE-2.27Kg(5.0 Lbs)

				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		623K WIRED PHONE JACK				APPROVED	
PART NO:						DRAW NO	
File Number:							
SCALE	/	REV	A	UNIT	mm		