
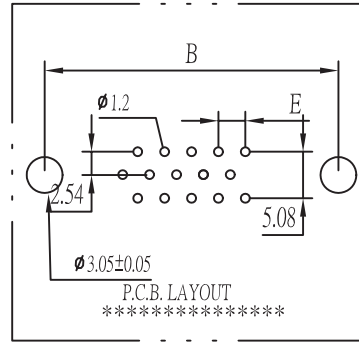


REV	DESCRIPTION	DATE
A	Initial Release	02'.06.17

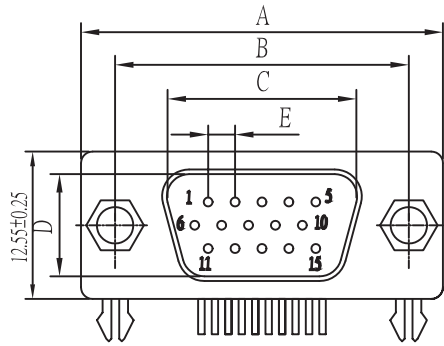

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Copper alloy,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 8.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C


PART NO. HDxxM0101K xx - L 1 E

Contact No.
15,26,44,62

Screw Options:

- 1.Assembled Grounding Hooks and UNC#4-40 Hex Screws Fixed
- 2.Riveted Grounding Hooks and #4-40 Hex Screws Attached Separately
- 3.Riveted Grounding Hooks and UNC#4-40 Hex Screws Fixed

Contact Plating:
00: Selective Gold Flash
15: Selective Gold 15u"
G: Full Gold Flash

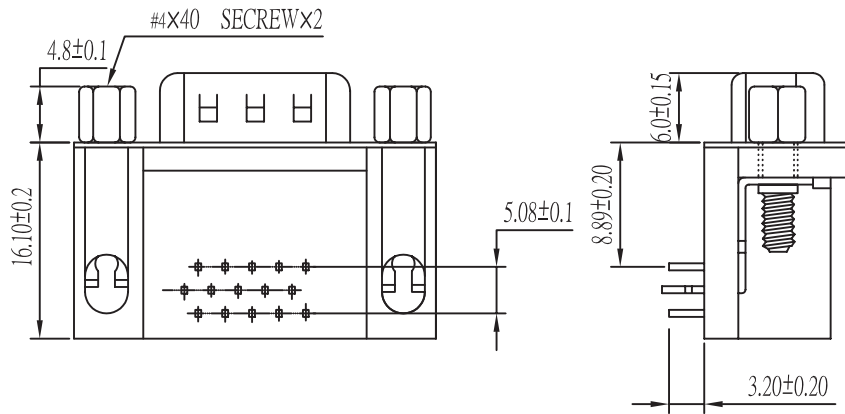

1	Screw Option 1	2	Screw Option 2	3	Screw Option 3

PART NO.	A ± 0.2	B ± 0.2	C ± 0.2	D ± 0.2	E ± 0.1
HD15M0101Kxx-LxE	30.81	24.99	16.92	8.38	2.29
HD26M0101Kxx-LxE	39.25	33.32	25.25	8.38	2.29
HD44M0101Kxx-LxE	53.04	47.04	38.96	8.38	2.29
HD62M0101Kxx-LxE	69.32	63.50	55.42	8.38	2.41

No.	Name	Qty	Material	Remarks & Thickness	Finish
5	Skew	2	Copper alloy	4.75*11.80mm	Nickel, Tin Plated
4	"Z" type board-lock	2	Copper alloy	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	15-62	Copper alloy	T=0.20mm	Gold Flashed, All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/Black

TOLERANCE UNSPECIFIED
.x ±0.3
.xx ±0.20
.xxx ±0.100
ANG. ±1°

				DRAWN BY		TOMMY
				CHECKED		
TITLE:		HDD RIGHT ANGLE P.B.C TYPE(M)插鎖NUT			APPROVED	
PART NO:		HD15M0101Kxx-LxE			DRAW NO	
File Number:					UNIT	
SCALE		2:1	REV	A	mm	