





REV	DESCRIPTION	APPROVAL	DATE
A	Initial Release		02'.10.31

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:
 Contact Current Rating:5 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Medohms Minimum
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:
 Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Minimum.

MATERIALS:
 Contacts:Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.
FINISHES:
 Contact:Gold Flash.
 Shell:Nickel Plated.

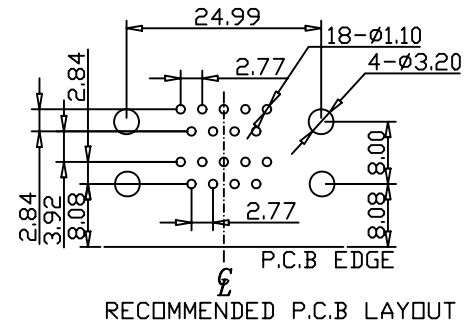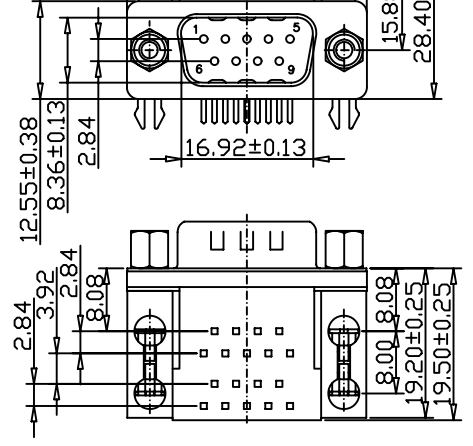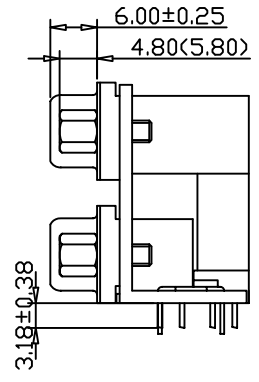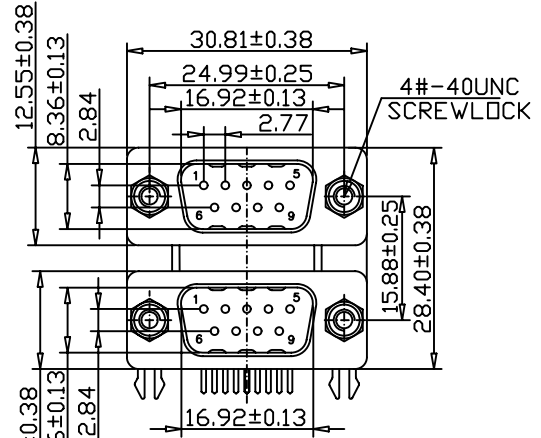

DB201 X 1 1 0 1 0 0 1 N	
SERIES NO.	COLOR STYLE
D-SUB CONNECTOR	1: ALL BLACK
DUAL PORT	2: FOR PC99 FOLLOW PANTONE COLOR
SPACING BETWEEN PORTS	3: UPPER PORT-BLACK
TYPE C-C (PROFILE)	4: UPPER PORT-FOR PC99 COLOR
A: 15.88mm(0.625")	LOWER PORT-BLACK
B: 19.05mm(0.725")	FLANGE MOUNTING OPTION
TOP CONNECTOR TYPE	0: #4-40 THREADED HOLE
1: 9-POS. MALE (09P)	1: #4-40 THREADED HOLE
2: 9-POS. FEMALE (09S)	WITH #4-40UNC SCREWLOCK INSTALLED
BOTTOM CONNECTOR TYPE	2: #4-40 THREADED HOLE
1: 9 POLE MALE (09P)	WITH #4-40 SCREWLOCK BULK-PACKED
2: 9 POLE FEMALE (09S)	3: M3 THREADED HOLE
CONTACT FINISH	4: M3 THREADED HOLE WITH M3 SCREWLOCK INSTALLED
0: FLASH GOLD	BOARD MOUNTING OPTION
1: 15u" GOLD	0: QUAD ARROWHEAD BOARDLOCK(8.08x8.0mm)
2: 30u" GOLD	1: QUAD ARROWHEAD BOARDLOCK(8.08x8.0mm)
	2: QUAD ARROWHEAD BOARDLOCK(11.43x8.0mm)
	3: QUAD ARROWHEAD BOARDLOCK(9.5x8.18mm)
	FRONT SHELL FLNISH
	0: TIN/LEAD OVER NICKEL
	1: NICKEL

UNLESS OTHERWISE SPECIFIED TOLERANC:
 Inch:
 .000 = ±0.01
 .0000 = ±0.050
 mm:
 .00 = ±0.25
 .000 = ±0.130
 Ang:
 0.0 = ±2°

貝強實業有限公司 PANSTRONG COMPANY LTD.		DRAWN BY	TOMMY
		CHECKED	
TITLE:	D-SUB CONN DUAL 9 MALE / 9MALE DUAL PORT		APPROVED
PART NO:	DB201X1101001N		DRAW NO
File Number:			UNIT mm
SCALE	1:1	REV	A

