

REV	DESCRIPTION	DATE
A	Initial Release	05'.07.16

MATERIAL:





- A. INSULATOR: NYLON & GLASS-FIBER
B. CONTACT: BRONZE
C. CONTACT PLATED: TIN PLATED

SPECIFICATION:

- A. CURRENT RATE: 3A/250V AC

CONTACT RESISTANCE:

- A. (BRONZE) 11.5m AT 2VΩ DC 100mA
B. (PHOSPHOR BRONZE) 10.9m AT 2VΩ DC 100mA
C. INSULATOR RESISTANCE: 1.5G ATΩ 500V DC 1Min
D. DIELECTRIC WITHSTANDING: 1000Vac 1Min

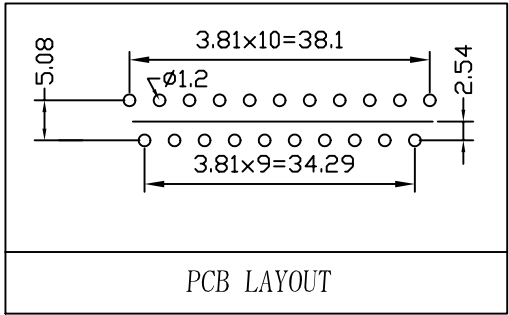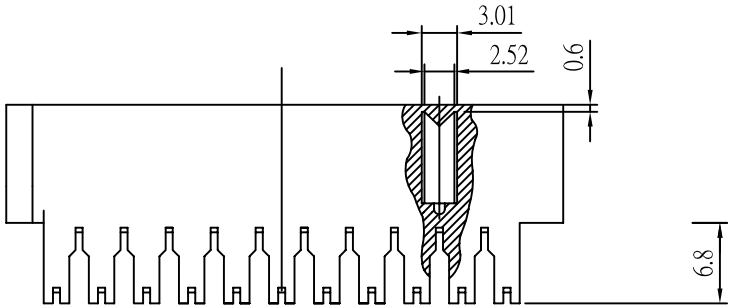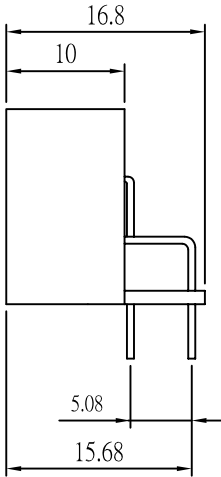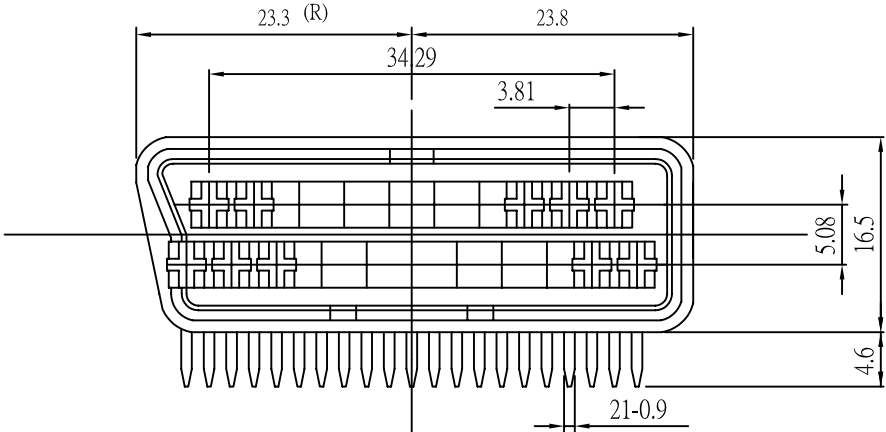

TOLERANCE	
0 - 10	±0.20
10 - 99	±1.00
100 - 999	±10.00
1000 - 9999	±100.00
10000 - 99999	±1000.00

 PANSTRONG COMPANY LTD.		DRAWN BY		TOMMY	
		CHECKED			
TITLE:		SCART Socket Right Angle (Plated Tin Terminals)		APPROVED	
PART NO:		ST21F-3001		DRAWING NO.	
SCALE		/	REV	A	UNIT mm

