REV	DESCRIPTION	DATE
A2	Incompliant dimensions correction	07'.08.14
A3	Replace frame	11'.08.25

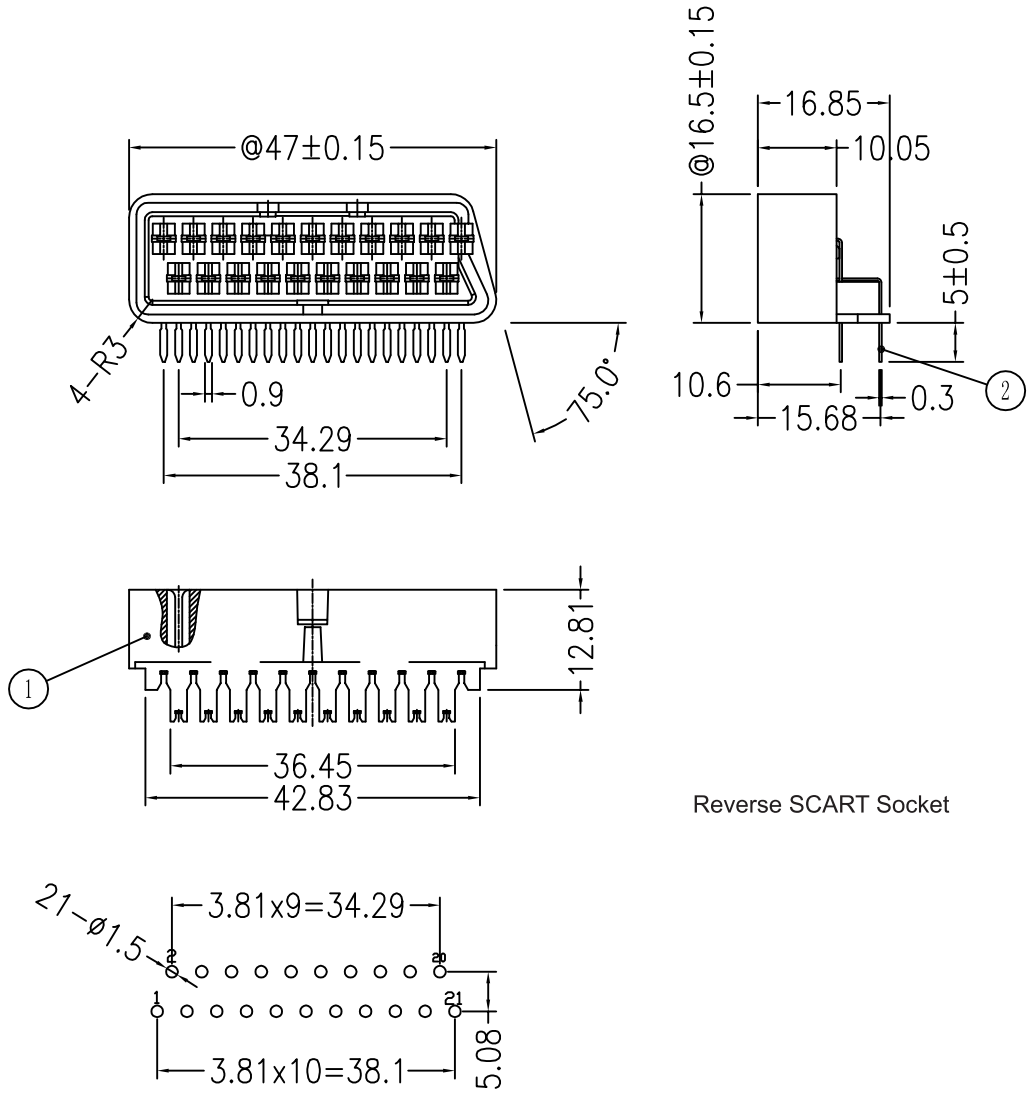

Reverse SCART Socket

PCB HOLE PATTERN

MATERIAL:
- A. INSULATOR: NYLON
- B. CONTACT: BRASS
- C. CONTACT PLATED: TIN PLATED

SPECIFICATION:
- A. CURRENT RATE: 3A/250V AC

CONTACT RESISTANCE:
- A. (BRASS) 25mΩ max
- B. INSULATOR RESISTANCE: 5000MΩ AT100V DC1Min
- C. **DIELECTRIC WITHSTANDING**: 350Var 1Min

Notation:
1. Conform HSFstandard
2. Have "@" symbol for the quality focus of measurement

NO.	PART NAME	MATERIAL
2	90° Contact	Tin over Brass
1	47MM Reverse Type	PC

PANSTRONG COMPANY LTD.				DRAWN BY	TOMMY
				CHECKED	
TITLE:	Reverse SCART Socket Right Angle Tin Plated Terminal			APPROVED	
PART NO:	ST21F-3002			DRAWING NO.	
SCALE	1:1	REV	A	UNIT	mm

TOLERANCES UNLESS OTHERWISE STATED
0<L≤4 ±0.10
4<L≤16 ±0.15
16<L≤64 ±0.20
64<L≤250 ±0.35
250<L≤500 ±0.45
500<L ±0.55
ANGLE ±1°