

REV	DESCRIPTION	DATE
A	Initial Release	07'.08.15

MATERIAL:

- A.INSULATOR: NYLON & GLASS FIBER
B.CONTACT: BRONZE
C.CONTACT PLATED: TIN PLATED

SPECIFICATION:

A.CURRENT RATE: 3A/250V AC

CONTACT RESISTANCE:


- A.(BRONZE)11.5M Ω AT 2V DC 100mA
B.(PHOSPHOR BRONZE)10.9M Ω AT 2V DC 100mA
C.INSULATOR RESISTANCE:1.5G Ω AT 500V DC 1Min
D.DIELECTRIC WITHSTANDING :1000V_{var} 1Min





PART NO. ST21F-3003E PH - SP

Contact Pin Material
Blank Bronze
PH Phosphorous Bronze

Package:
Blank Standard PVC Tray
SP: Single Pack with Polyform for the pins

	Part name	Q'ty	Material	Finish
2	contact pin	21	as p/n list	tin plating
1	insulator	1	PC	black

 PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED			
TITLE:		SCART Female Right Angle		APPROVED			
PART NO:		ST21F-3003E		DRAWING NO.			
SCALE		1:1	REV	A	UNIT	mm	

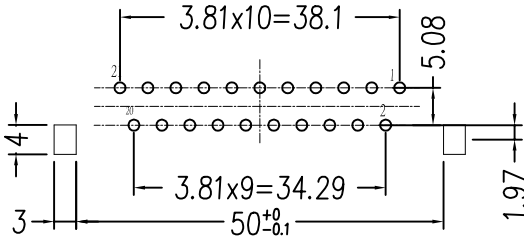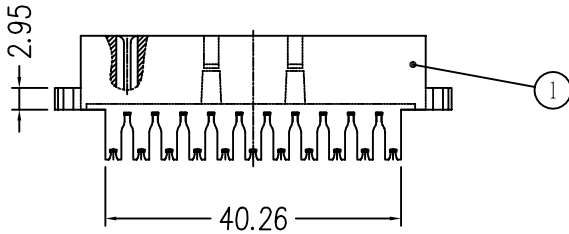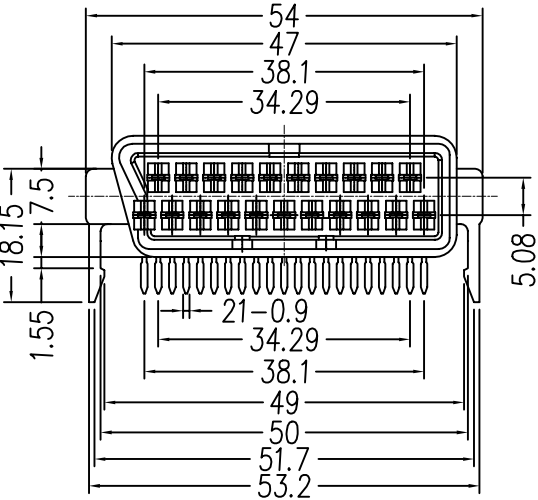

PCB HOLE PATTERN

TOLERANCE UNSPECIFIED
0<L≤1 ±0.05
1<L≤16 ±0.10
16<L≤50 ±0.15
50<L≤250 ±0.20
250<L≤500 ±0.25
500<L ±0.30
ANGLE±0.25°