
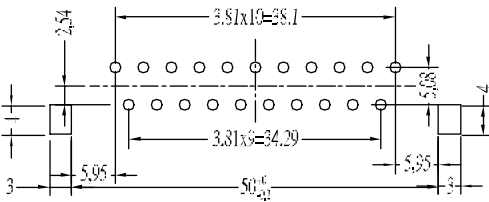
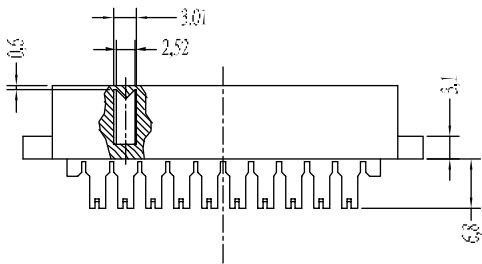


REV	DESCRIPTION	DATE
A	Initial Release	06.01.09

MATERICL:
A.INSULATOR: NYLON & GLASS FIBER
B.CONTACT: BRONZE
C.CONTACT PLATED: TIN PLATED

SPECIFICATION:
A.CURRENT RATE: 3A/250V AC

CONTACT RESISTANCE:
A.(BRONZE) 11.5M AT 2VΩ DC 100mA
B.(PHOSPHOR BRONZE) 10.9M AT 2VΩ DC 100mA
C.INSULATOR RESISTANCE: 1.5G ATΩ 500V DC 1Min
D.DIELECTRIC WITHSTANDING: 1000Var 1Min

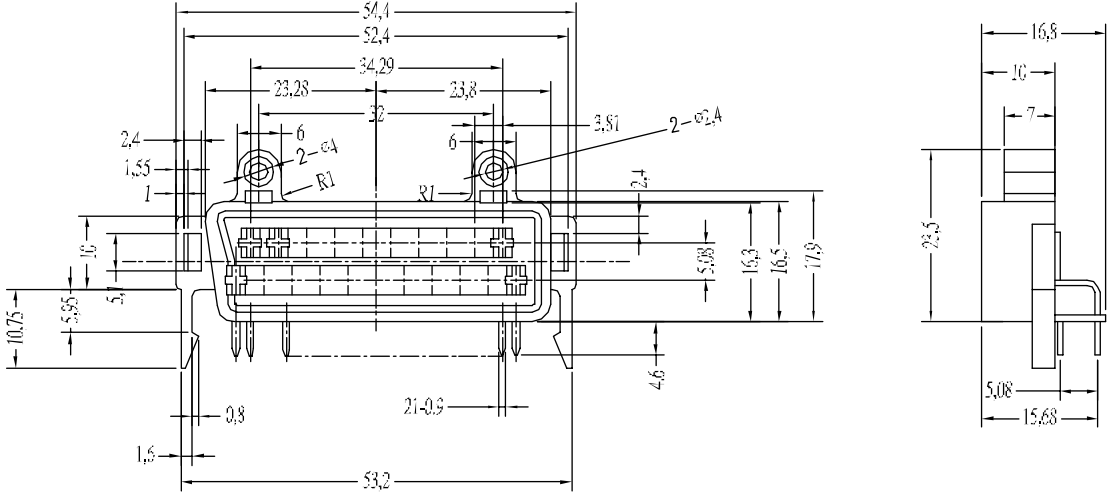

PCB HOLE PATTERN

 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:	SC21S90° 54 with Flanges CON			APPROVED
PART NO:	ST21F-3004			DRAWING NO.
SCALE	1:1	REV	A	UNIT mm

TOLERANCE UNSPECIFIED
.x ±0.3
.xx ±0.20
.xxx ±0.100
ANG. ±1°

