

REV	DESCRIPTION	DATE
A	Initial Release	06'.01.09

MATERIAL:



- A.INSULATOR: NYLON & GLASS FIBER
- B.CONTACT:BRONZE
- C.CONTACT PLATED:TIN PLATED

SPECIFICATION:


- A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:

- A.(BRONZE)11.5M AT 2V Ω DC 100mA
- B.(PHOSPHOR BRONZE)10.9M AT 2V Ω DC 100mA
- C.INSULATOR RESISTANCE:1.5G AT 500V Ω DC 1Min
- D.DIELECTRIC WITHSTANDING:1000V_{ar} 1Min

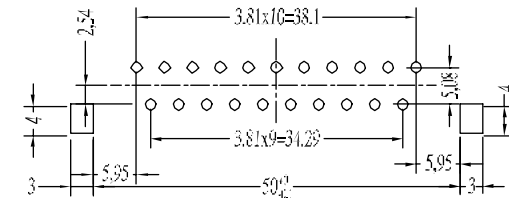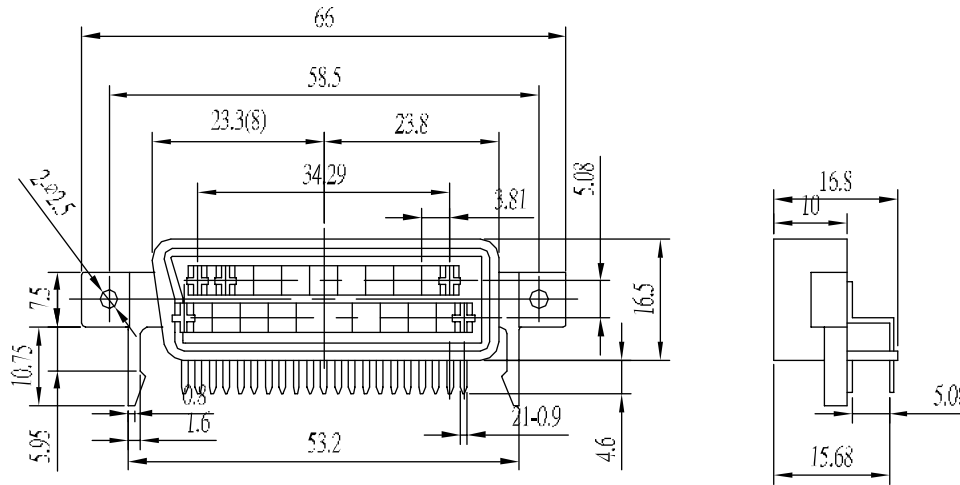

PCB HOLE PATTERN

 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:	SC21S90° 66MM CON			APPROVED
PART NO:	ST21F-3007			DRAWING NO.
SCALE	1:1	REV	A	UNIT mm
				

TOLERANCE UNSPECIFIED	
.X	±0.3
.XX	±0.20
.XXX	±0.100
ANG.	±1°