

REV	DESCRIPTION	DATE
A	Initial Release	06'.01.09


MATERIAL:
A.INSULATOR: NYLON & GLASS FIBER
B.CONTACT:BRONZE
C.CONTACT PLATED:TIN PLATED

SPECIFICATION:

A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:

A.(BRONZE)11.5M AT 2V Ω DC 100mA
B.(PHOSPHOR BRONZE)10.9M AT 2VΩ DC 100mA
C.INSULATOR RESISTANCE:1.5G AT Ω500V DC 1Min
D.DIELECTRIC WITHSTANDING:1000Vvar 1Min

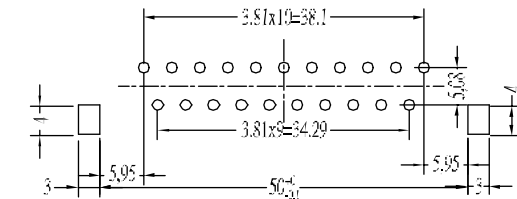

PCB HOLE PATTERN

TOLERANCE UNSPECIFIED	
.X	±0.3
.XX	±0.20
.XXX	±0.100
ANG.	±1°

 PANSTRONG COMPANY LTD. TITLE: SCART Socket Right ANgle, Screw Holes	DRAWN BY		TOMMY	
	CHECKED			
PART NO: ST21F3008	APPROVED			
	DRAWING NO.			
SCALE	1:1	REV	A	UNIT mm 