


REV	DESCRIPTION	DATE
A	Initial Release	11'.09.13

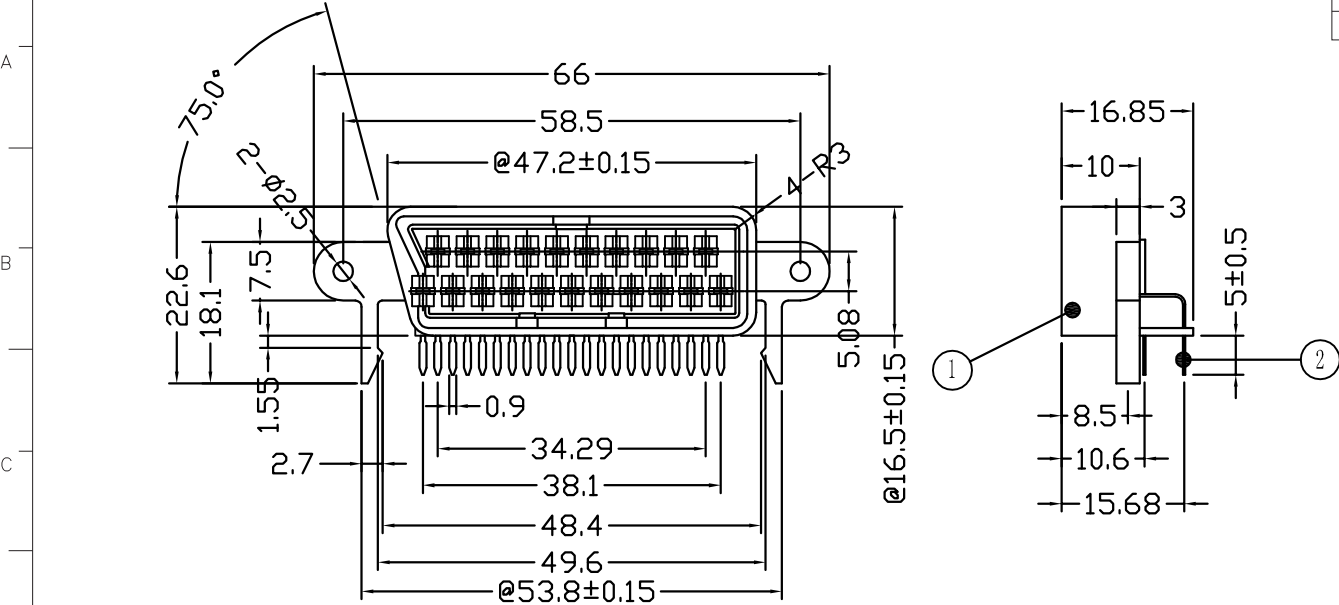

MATERIAL:

- A. INSULATOR: NYLON
- B. CONTACT: BRASS
- C. CONTACT PLATED: TIN PLATED

SPECIFICATION:


- A. CURRENT RATE: 3A/250V AC

CONTACT RESISTANCE:


- A. (BRASS) 25mΩ max
- B. INSULATOR RESISTANCE: 5000MΩ AT100V DC1Min
- C. DIELECTRIC WITHSTANDING: 350Var 1Min

Notation:

- 1. Conform HSFstandard
- 2. Have “@” symbol for the quality focus of measurement

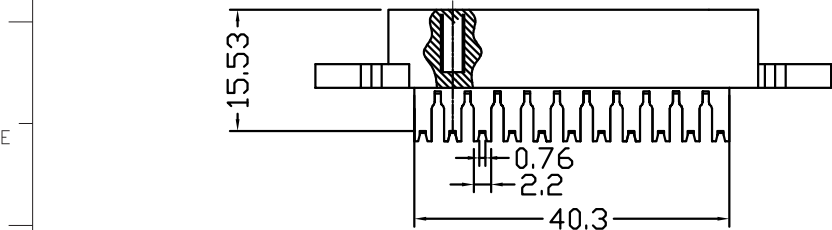

2	90° Contact	Tin over Brass
1	66mm Round Ears, Thin Plastic	PC
NO.	PART NAME	MATERIAL

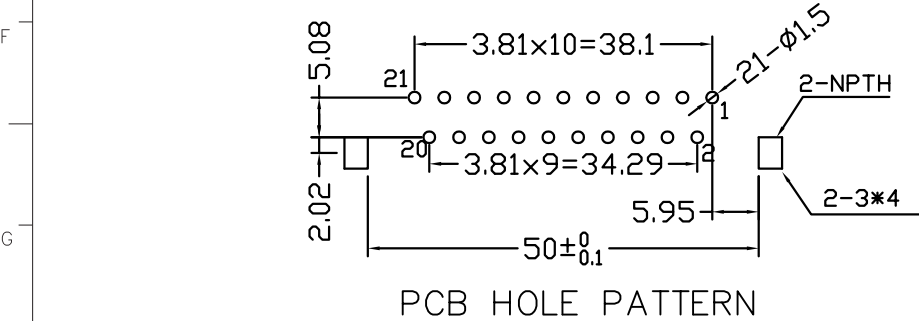

TOLERANCES (UNLESS OTHERWISE STATED)
0/0.04 ± 0.10
4/0.016 ± 0.15
16/0.064 ± 0.25
64/0.250 ± 0.35
250/0.500 ± 0.45
500/0.55 ± 0.55
ANGLES ± 1°

 PANSTRONG COMPANY LTD. TITLE: Right Angle with Think-Round Screw Mounting Holes and Lugs	DRAWN BY		TOMMY	
	CHECKED			
PART NO:	ST21F-3010		APPROVED	
			DRAWING NO.	
SCALE	1:1	REV	A	UNIT mm
				