
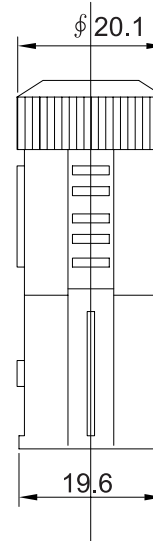


REV.	DESCRIPTION	DATE
§	Initial Release	06.03.14

Dimension: $\phi 9$, $\phi 11$, $\phi 13$,

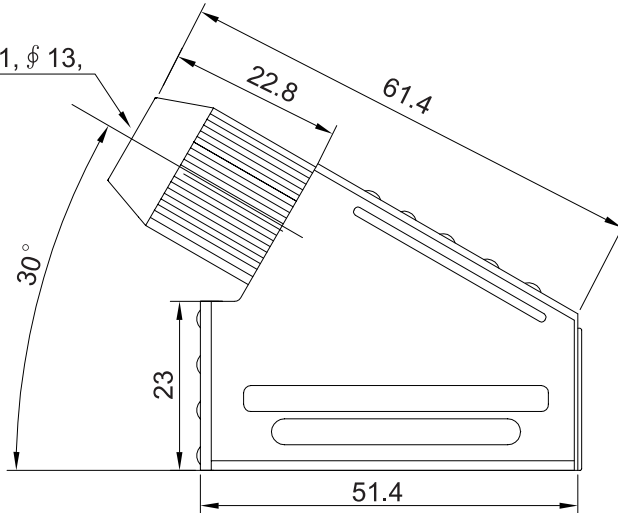

MATERIAL:

A.INSULATOR:PC(94V-2)&GLASS-FIBER
B.CONTACT:BRONZE
C.CONTACT PLATED:TIN PLATED


SPECIFICATION:

A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:

A.(BRONZE)11.5m AT 2V Ω DC 100mA
B.(PHOSPHOR BRONZE)10.9m AT 2V Ω DC 100mA

INSULATOR RESISTANCE:1.5G ATW 500V DC 1Min
Dielectric withstanding:1000Vac 1Min
BRONZE-PART NO ST21F 2003
PHOSPHOR BRONZE - PART NO ST21F-2003-PH

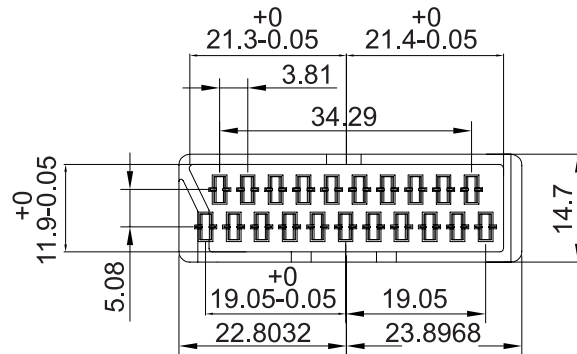

DWG NO:	MATERIAL:	 PANSTRONG COMPANY LTD.		
MODEL NO:	FINSH:			
UNIT: mm	SIZE:	COLOR:	PART NAME: Scart Female in Plastic Hood, Soldering Terminals wire Holder Cap	
TOLERANCE UNspecified	DR: TOMMY	CHK:	PART NO: ST21F-2003	REV: §
.x ±0.3	APP:	SCALE: /	SHEET: 1 of 1	
.xx ±0.100				
.xxx ±1°				
ANG.				