

REV	DESCRIPTION	DATE
A	Initial Release	17'.08.22

A

A

B

B

C

C

D

D

E






E

F



F

G

G

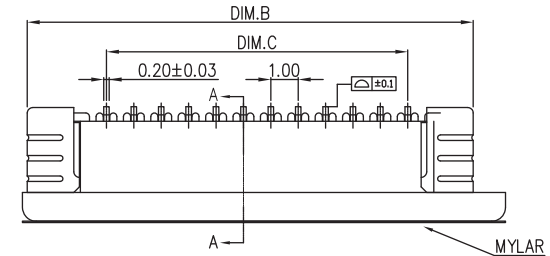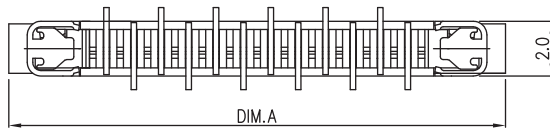

SECTION A-A

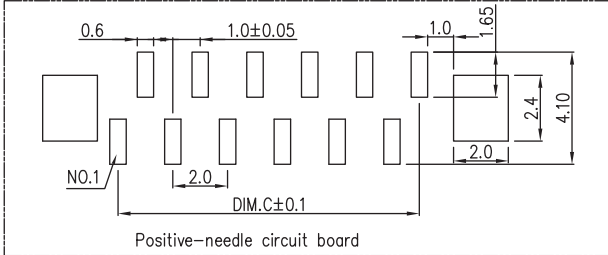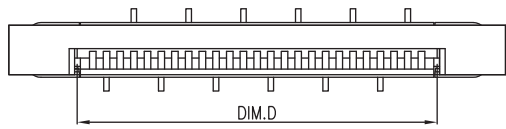

RoHS Compliant

SPEC :

- 1.Housing:High-Temp Plastic,UL94-V
Color:Black
- 2.Locker:High-Temp Plastic,UL94-V
Color:Black
- 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
- 4.Solder Tab:BRASS
- 5.Temperature Rating:-25°C~+85°C
- 6.Dielectric Withstanding Voltage:500V AC/Min

PART NO.

FPxx-C03SWZA-2GR
1 23

- 1. Contact Positions: 4...17
- 2. Contact Plating: Blank: Tin
G : Flash Gold
- 3. Package: T: Tube
R: Tape & Reel

AVAILABLE CONTACT POLE NUMBERS				
PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	10.10	9.10	3.00	5.10
5	11.10	10.10	4.00	6.10
6	12.10	11.10	5.00	7.10
7	13.10	12.10	6.00	8.10
8	14.10	13.10	7.00	9.10
9	15.10	14.10	8.00	10.10
10	16.10	15.10	9.00	11.10
11	17.10	16.10	10.00	12.10
12	18.10	17.10	11.00	13.10
13	19.10	18.10	12.00	14.10
14	20.10	19.10	13.00	15.10
15	21.10	20.10	14.00	16.10
16	22.10	21.10	15.00	17.10
17	23.10	22.10	16.00	18.10

 PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED		TOMMY	
TITLE:		FPC P1.0 H4.4 SMT Vertical Type Type A: Pin 1 Left Down Row			APPROVED		CAROL	
PART NO:					DRAWING NO.			
SCALE		/	REV	A	UNIT	mm		

TOLERANCE SCALE	
.X±0.30	None
.XX±0.20	UNIT
.XXX±0.10	mm