



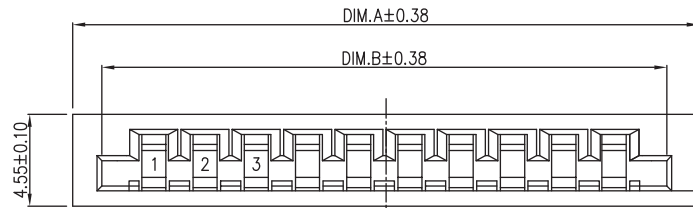
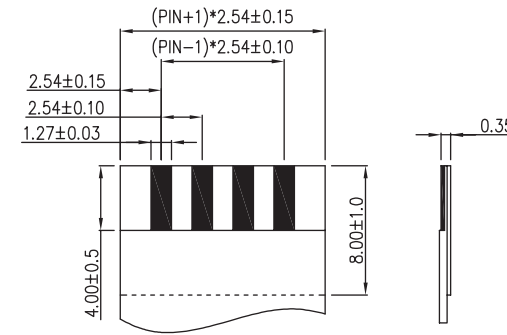


REV	DESCRIPTION	DATE
A	Initial Release	10.10.22

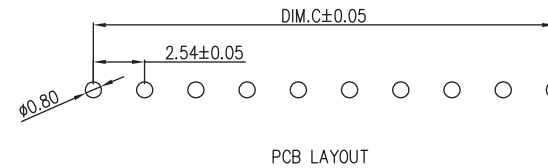

SPEC :

- Housing: High-Temp Plastic, UL94-V
Color: Black
- Locker: High-Temp Plastic, UL94-V
Color: Black
- Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
- Solder Tab: BRASS
- Temperature Rating: -55°C ~ +85°C
- Dielectric Withstanding Voltage: 500V AC/Min

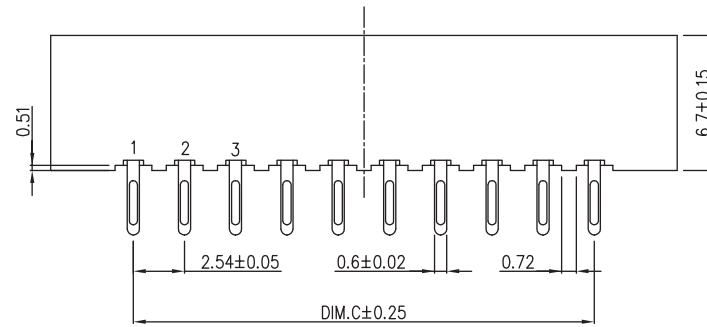

APPLICABLE FFC/FPC

PIN	DIM.A	DIM.B	DIM.C
2	10.74	8.43	2.54
3	13.28	10.97	5.08
4	15.82	13.51	7.62
5	18.36	16.05	10.16
6	20.9	18.59	12.7
7	23.44	21.13	15.24
8	25.98	23.67	17.78
9	28.52	26.21	20.32
10	31.03	28.75	22.86
11	33.3	31.29	25.4
12	36.14	33.83	27.94
13	38.68	36.37	30.48
14	41.22	38.91	33.02
15	43.76	41.45	35.56
16	46.3	43.99	38.1
17	48.84	46.53	40.64
18	51.38	49.07	43.18

Ordering Information

FP-xxA01SKN-T

Number of Contact: 02...18

Contact Plating:
T : Tin
F : Selective Gold
G : Fully Gold Flash

RoHS Compliant

TOLERANCE	SCALE
.X±0.30	None
.XX±0.20	UNIT
.XXX±0.10	mm

PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:	FPC Connector, Pitch 2.54mm Dip Through Hole, Vertical, Non-ZIF			APPROVED
PART NO:	FP-xxA01SKN			DRAWING NO. JS-1160-XX
SCALE	/	REV	A	UNIT mm

