



REV	DESCRIPTION	DATE
A	Initial Release	20',10,22

Rohs Compliant


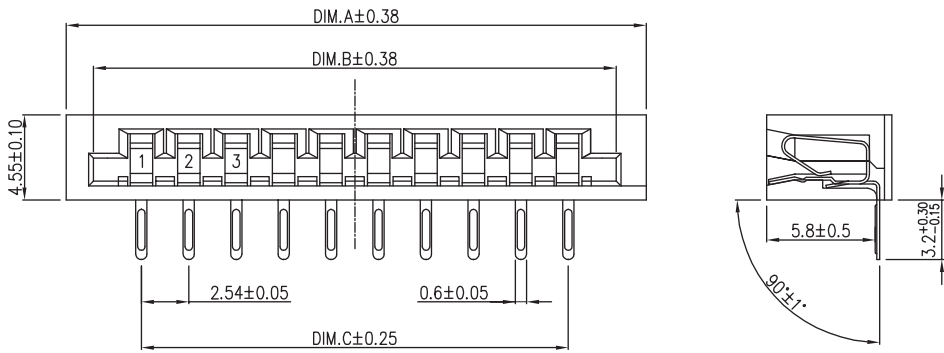



- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V
Color:Black
 - 2.Locker:High-Temp Plastic,UL94-V
Color:Black
 - 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - 4.Solder Tab:BRASS
 - 5.Temperature Rating:-55°C~+85°C
 - 6.Dielectric Withstanding Voltage:500V AC/Min

Ordering Information

FP-xxA01RKN-T
Number of Contact 02...18
Contact Plating:
T : Tin
F : Selective Gold
G : Fully Gold Flash

PIN	DIM. A	DIM.B	DIM.C
2	10.74	8.43	2.54
3	13.28	10.97	5.08
4	15.82	13.51	7.62
5	18.36	16.05	10.16
6	20.9	18.59	12.7
7	23.44	21.13	15.24
8	25.98	23.67	17.78
9	28.52	26.21	20.32
10	31.06	28.75	22.86
11	33.6	31.29	25.4
12	36.14	33.83	27.94
13	38.68	36.37	30.48
14	41.22	38.91	33.02
15	43.76	41.45	35.56
16	46.3	43.99	38.1
17	48.84	46.53	40.64
18	51.38	49.07	43.18

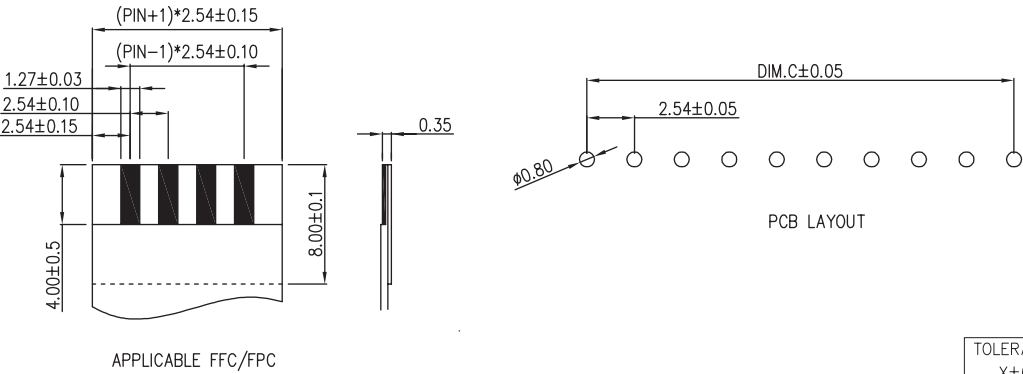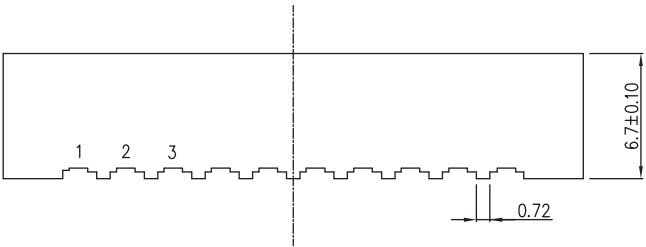

 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY
	CHECKED		TOMMY
TITLE:	FFC Connector, Pitch 2.54mm Dip R/A Right Angle, Non-ZIF		
PART NO:	FP-xxA01RKN		
SCALE	/	REV	A
DRAWING NO.		UNIT	mm
			

TOLERANCE
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10