
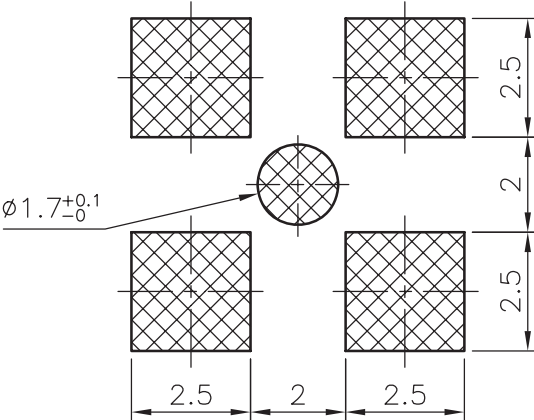
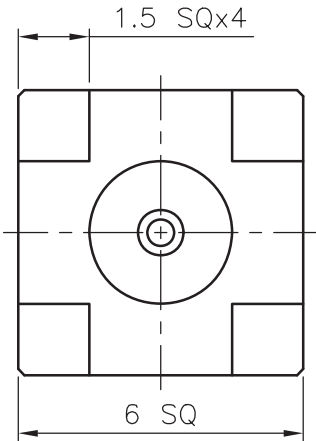


REV	DESCRIPTION	DATE
A	Initial Release	07.06.14

REMARK: RoHS COMPLIANT

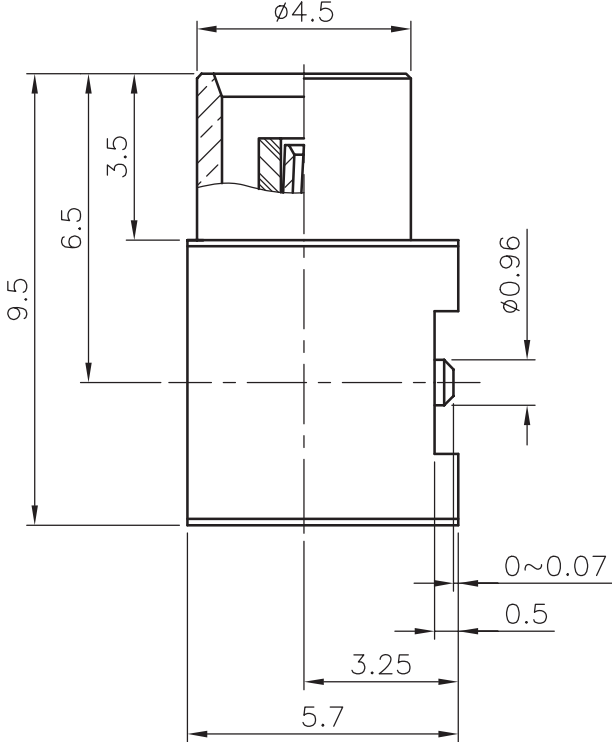

RECOMMENDED
SOLDERING PADS

- FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - 4. TEFLON MIL-P-19468
 - 5. BERYLLIUM COPPER PER QQ-C-530

INSULATOR	NOTE 4	WHITE
BODY	NOTE 1	NOTE 2
INSULATOR	NOTE 4	WHITE
CONTACT PIN	NOTE 5	NOTE 3
CUBE BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES = ±5°

 PANSTRONG COMPANY LTD.				DRAWN BY		TOMMY	
				CHECKED		TOMMY	
TITLE: MCX R/A SMT JACK				APPROVED		CAROL	
PART NO: XF01G0103				DRAWING NO.			
SCALE 6:1 REV A				UNIT	mm	