

REV	DESCRIPTION	DATE
A	Initial Release	17.03.21
B	Added the information of operation temperature	17.09.26

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

10

11

1

2

3

4

5

6

7

8

9

10



11

5/8-24UNEF-2A

5/16-32UNEF-2A


1/4-36UNS-2A

9.5 HEX

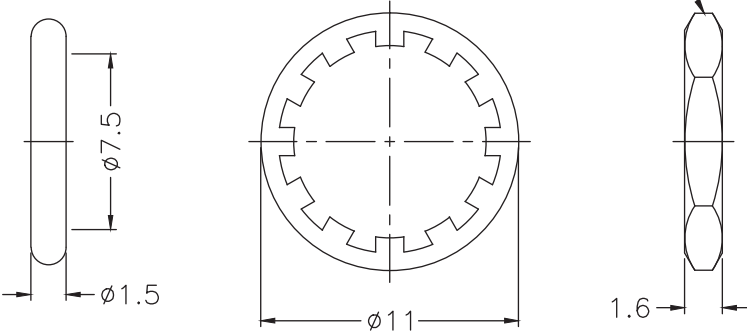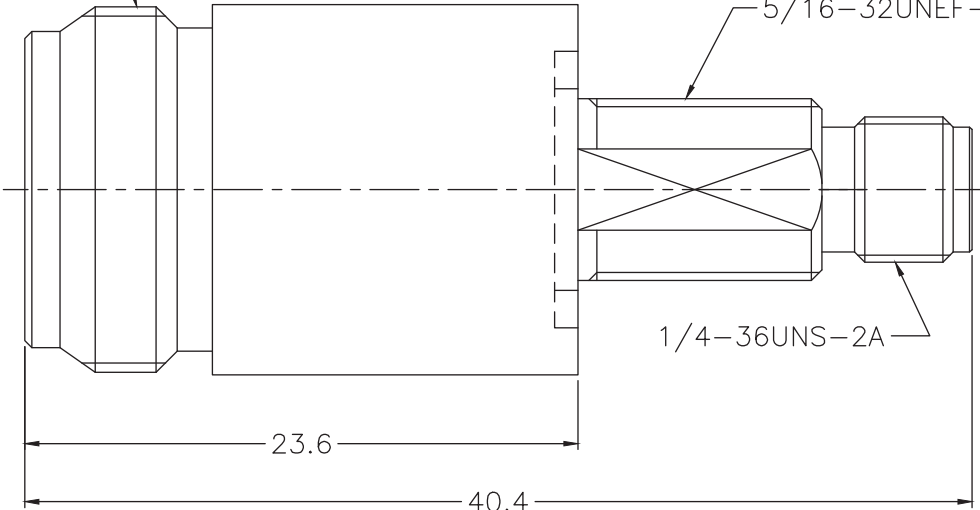

NOTES:
FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. MIN. 100u" NICKEL, over MIN. 50u" COPPER
3. BERYLLIUM COPPER
4. MIN. 3u" GOLD over MIN. 50u" NICKEL over MIN. 50u" COPPER
5. TEFLON
Ⓜ MATERIAL:
OPERATION TEMPERATURE: -65°C to +165°C

8	HEX NUT	NOTE 1	NOTE 2	1
7	LOCK WASHER	NOTE 1	NOTE 2	1
6	GASKET	NBR	BLACK	1
5	INNER BODY	NOTE 1	NOTE 2	1
4	INSULATOR	NOTE 5	NATURAL	1
3	CONTACT PIN	NOTE 3	NOTE 4	1
2	INSULATOR	NOTE 5	NATURAL	1
1	BODY	NOTE 1	NOTE 2	1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY



RECOMMENDED
MOUNTING HOLE

RoHS COMPLIANT

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

 PANSTRONG COMPANY LTD.	DRAWN BY		TOMMY	
	CHECKED			
TITLE:	N JACK TO SMA JACK ADAPTOR			APPROVED
PART NO:	SMAF/NF02N01-T2			DRAWING NO.
SCALE	3:1	REV	B	UNIT mm
				