
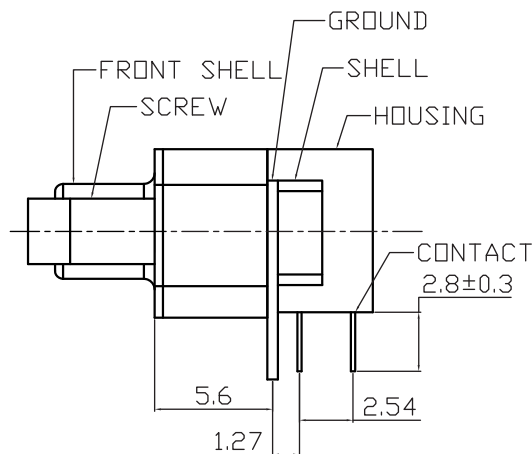
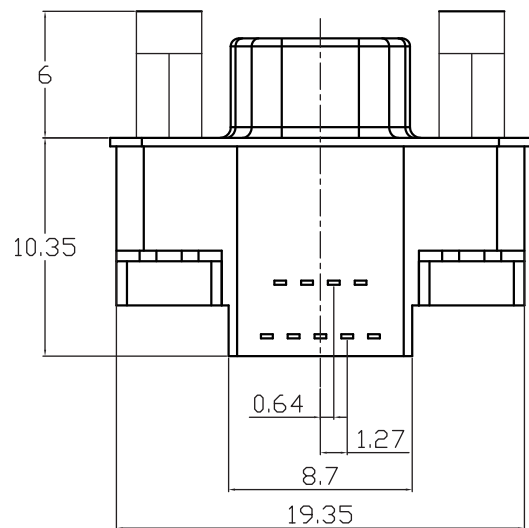
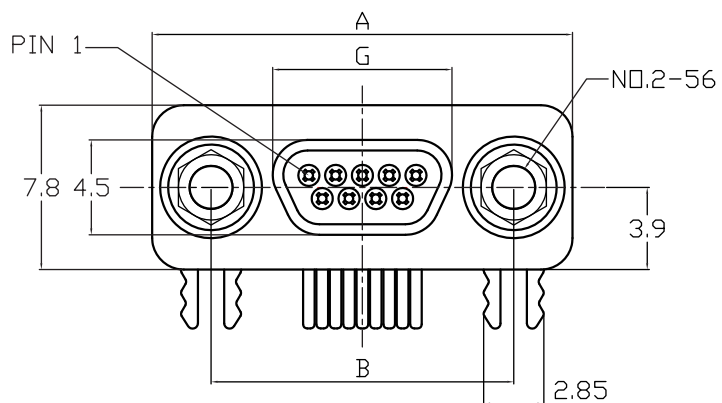


PANEL CUT-OUT

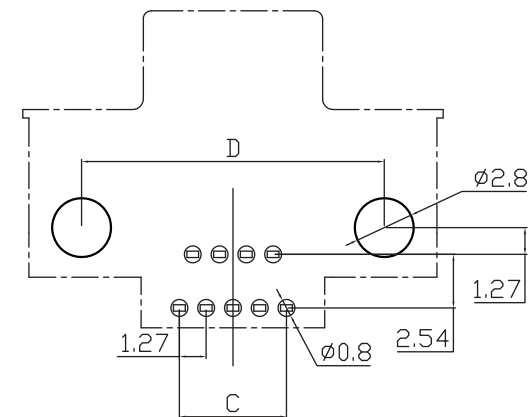

P.C.B. LAYOUT

1. MATERIAL :
- 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. FRONT SHELL : SPCC
 - 1-4. SHELL : BRASS
 - 1-5. GROUND : BRASS
 - 1-6. SCREW : BRASS

2. FINISH :
- 2-1. CONTACT : GOLD 15u" ON CONTACT AERA
MATTE TIN 60u" ON SOLDER AERA
 - 2-2. FRONT SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-3. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-4. GROUND : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-5. SCREW : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 1A at 25℃/77℉, 0.7A at 70℃/158℉
 - 3-2. Voltage : 350Vac

4. Environmental :
- 4-1. Operation Temperature : -40℃~+125℃

P/N	NUMBER OF PINS	A	B	C	D	E	F	G
MCD01R-09MK15-S5-2	9	19.93	14.35	5.08	14.35	10.41	14.35	8.30
MCD01R-15MK15-S5-2	15	23.75	18.16	8.89	18.16	14.22	18.16	12.20
MCD01R-25MK15-S5-2	25	30.10	24.51	15.23	24.51	20.57	24.51	18.55

TOLERANCE	
.X	±0.20
.XX	±0.15
.XXX	±0.10
.XXXX	±0.05
ANGULA	±1°

 PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED			
TITLE:		MICRO D-SUB 9-25(P)板上90° 帶螺絲			APPROVED			
PART NO:					DRAW NO			
DRAW. BOX NO:								
SCALE		1:1	REV	A	UNIT	mm	