

REV	DESCRIPTION	APPROVAL	DATE
A	Initial Release		10'.05.17

MATERIAL & FINISH SHELL:
 STEEL
 YELLOW CHAROME(ZINC PLATED)
 OR TIN PLATED

PIN CONTACT:
 GOLD PLATED OVER NICKEL

INSULATOR:
 PBT & GLASS-FIBER REINFORCED




NUMBER OF CONTACT:
 9, 15, 25, 37, 50

CURRENT RATING:
 5 amp.

DIELECTRIC STRENGTH:
 1000V FOR ONE MINUTE

INSULATOR RESISTANCE:
 1000MΩMIN. at 500V DC

TEMPERATURE:
 -55℃ ~ +105℃

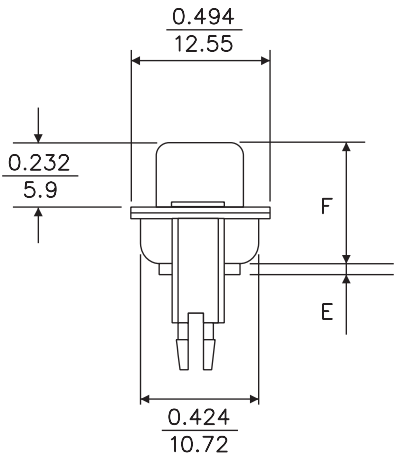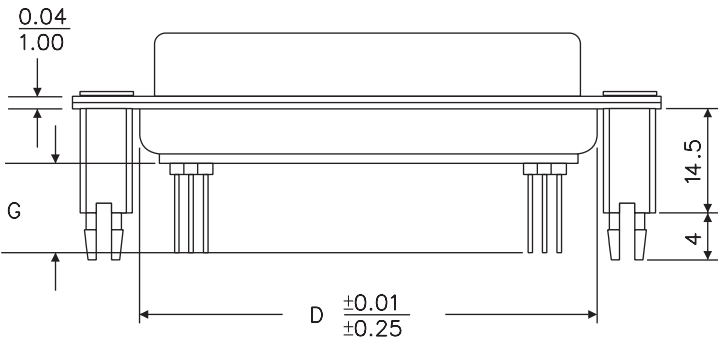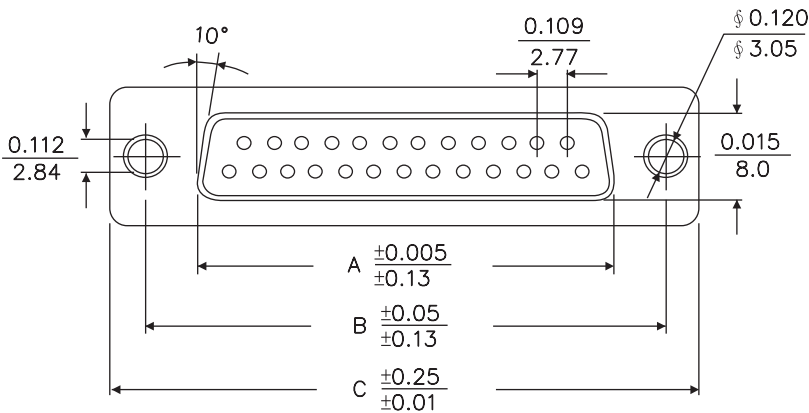

ITEM NO.	A	B	C	D	E	F	G
DB9F0402G-13	16.33(0.643)	24.99(0.984)	30.81(1.213)	19.28(0.759)	1.2(0.047)	11.0(0.433)	13.0(0.512)
DB15F0402G-13	24.66(0.91)	33.32(1.312)	39.14(1.541)	27.51(1.083)	1.2(0.047)	11.0(0.433)	13.0(0.512)
DB25F0402G-13	38.38(1.511)	47.04(1.852)	53.04(2.088)	41.3(1.625)	1.2(0.047)	11.0(0.433)	13.0(0.512)
DB37F0402G-13	54.84(2.159)	63.50(2.500)	69.32(2.729)	57.71(2.272)	1.2(0.047)	11.0(0.433)	13.0(0.512)
DB50F0402G-13	52.34(2.060)	61.11(2.406)	66.92(2.634)	55.30(2.177)	1.2(0.047)	11.0(0.433)	13.0(0.512)

PANSTRONG COMPANY LTD.					DRAWN BY		TOMMY	
					CHECKED			
TITLE:		"D-SUB" CONNECTOR WIRE WRAP STRAIGHT DIP TYPE "SOCKET" MACHINED PIN W/FORK CLIP RIVETTED			APPROVED			
PART NO:					DBxxF0402G-13D		DRAW NO	
File Number:								
SCALE		／	REV	A	UNIT	mm	