


REMARK: RoHS COMPLIANT

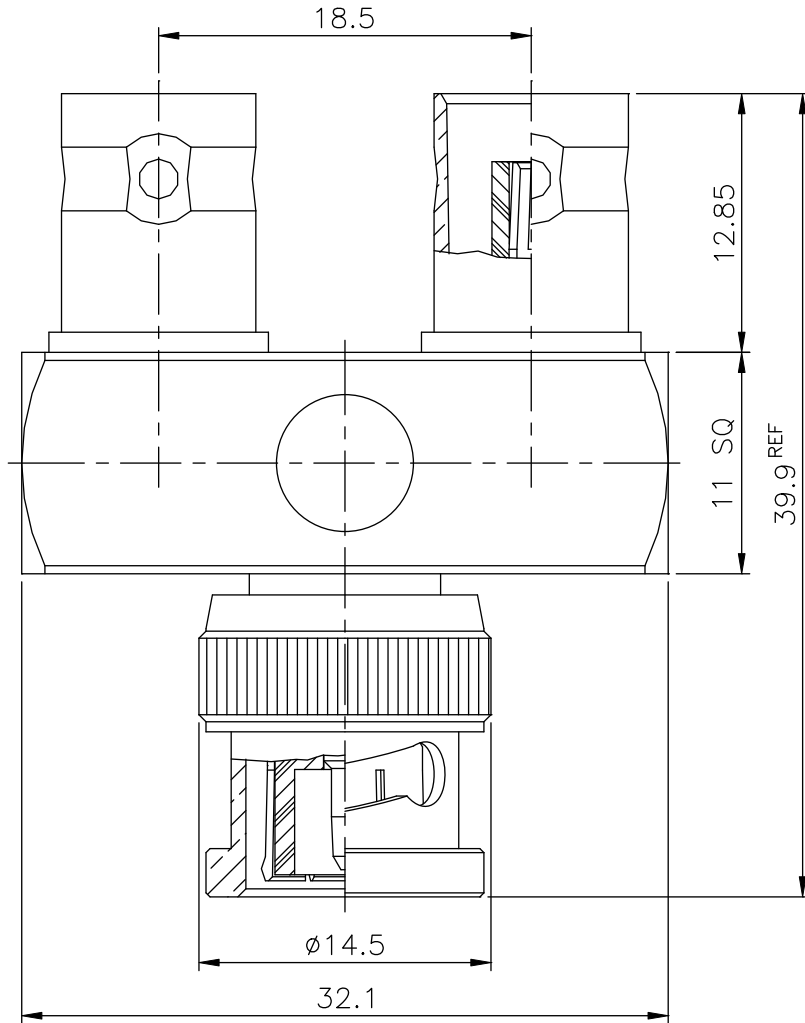

REV	DESCRIPTION	DATE
A1	Initial Release	06'.10.04

FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750

COVER	NOTE 1	NOTE 2
LOCK RING	NOTE 1	NOTE 2
CONTACT PIN	NOTE 4	NOTE 3
INSULATOR	DELTRIN	WHITE
BODY	NOTE 1	NOTE 2
INSULATOR	DELTRIN	WHITE
CONTACT PIN	NOTE 1	NOTE 3
CONTACT PIN	NOTE 1	NOTE 3
INSULATOR	DELTRIN	WHITE
SHELL	NOTE 1	NOTE 2
GASKET	SILICONE	RED
C RING	SS41	NOTE 2
SPRING	SK5	NOTE 2
WASHER	SS41	NOTE 2
BODY	NOTE 1	NOTE 2
CUBE BODY	NOTE 1	NOTE 2
DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED
TOLERANCES

0.5-6 = ±0.2
 >6-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1
 >315-1000 = ±1.6
 ANGLES = ±5°

PANSTRONG COMPANY LTD.				DRAWN BY	TOMMY
				CHECKED	
TITLE:	BNC "Y" LINK JACK-PLUG-JACK ADAPTOR			APPROVED	
PART NO:	BFx2/BM02N			DRAW NO	
File Number:					
SCALE	2.5:1	REV	A1	UNIT	mm